

# Makita<sup>®</sup>

## ent



2021

## Index

Angle Grinder	7	Jig Saw	10	M0400B	6	M2402B	6	M6000B	4	M8600B	5	M9503RB	7
Belt Sander	9	Mixer	4	M0401B	6	M2403B	6	M6001B	4	M8700B	5	M9504B	8
Blower	12	Multi Tool	9	M0600B	4	M3600B	11	M6002B	4	M8701B	5	M9505B	7
Circular Saw	10	Planer	11	M0800B	6	M3601B	11	M6200B	3	M9001B	8	M9506B	7
Combination Hammer	5	Portable Cut-off	6	M0801B	5	M3700B	11	M6201B	4	M9002B	8	M9507B	7
Compound Miter Saw	10	Power Planer	11	M0900B	8	M3701B	11	M6202B	4	M9003B	8	M9508B	7
Cordless Driver Drill	3	Random Orbit Sander	9	M0901B	8	M4000B	12	M6301DB	3	M9100B	9	M9509B	7
Cordless Hammer Driver Drill	3	Recipro Saw	10	M0910B	8	M4001B	12	M6500B	3	M9200B	9	M9510B	7
Cordless Impact Driver	3	Rotary Hammer	5	M0920B	8	M4100B	6	M6501B	3	M9201B	9	M9511B	7
Cutter	6	Router	11	M0921B	8	M4101B	6	M6600B	4	M9202B	9	M9512B	7
Demolition Hammer	6	Router (Plunge type)	11	M1100B	11	M4301B	10	M6901DB	3	M9203B	9	M9513B	7
Die Grinder	9	Trimmer	11	M1901B	11	M4302B	10	M8100B	5	M9204B	9	M9800B	9
Drill	3			M1902B	11	M4500B	10	M8101B	5	M9400B	9		
Finishing Sander	9			M2300B	10	M4501B	10	M8103B	5	M9501B	7		
Hammer Drill	5			M2400B	6	M5801B	10	M8104B	5	M9502B	7		
High Speed Drill	3			M2401B	6	M5802B	10	M8301DB	3	M9503B	7		

## Note

- Makita reserves the right to change specifications of parts and accessories without notice.
- Items of standard equipment and specifications may vary by country or area.
- Please state required voltage when ordering. These offers are subject to availability in each country.
- Actual product color may differ slightly from color reproduced here.
- Weight data in this catalogue is the value measured by us according to EPTA Procedure 01/ver.2.1

## Icon

Double Insulation	Keyless Chuck	17mm Hex Shank	Bayonet Shank Jig Saw Blade
Variable Speed	Torque Setting 16	Hook & Loop	Makita Shank Jig Saw Blade
Brake	Soft Start	Torque Limiter	Carrying Case
Reversing	Dust Collecting	Bevel Cutting	
Mechanical 2-Speed	SDS-PLUS Shank	Orbital Cutting	



## Battery & Charger

Lithium-ion  
1.5Ah

BL1815G




18V

DC18WA



Charging time

**70min.**

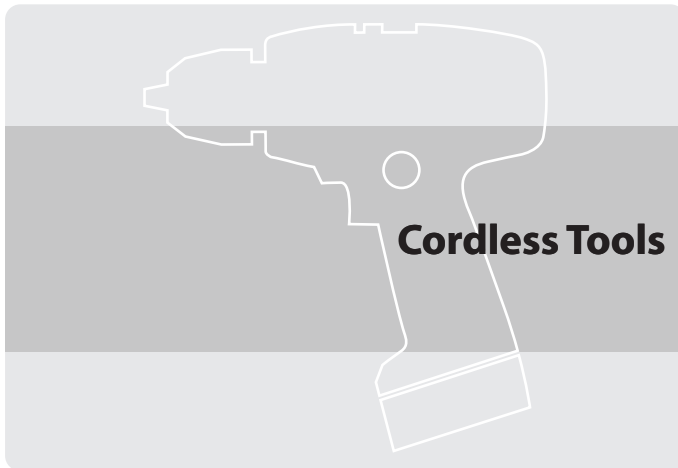

### Cordless Impact Driver

18V Li-Ion 1.5Ah

#### M6901DB

18V Li-Ion Cordless 135 N-m (1,200 in.lbs.) Impact Driver, G-Battery



Charger, Battery

Capacity	Machine Screw: M4 - M8 (5/32" - 5/16") Standard Bolt: M5 - M14 (3/16" - 9/16") High Tensile Bolt: M5 - M12 (3/16" - 1/2") Coarse thread (in length): 22 - 125 mm (7/8" - 4-7/8")
Hex Shank	6.35 mm (1/4")
No Load Speed (RPM)	0 - 2,400
Impacts Per Minute (IPM)	0 - 3,000
Max Fastening Torque	135 N-m (1,200 in.lbs.)
Vibration Level	Impact tightening of fasteners of the maximum capacity of the tool: 8.0 m/s <sup>2</sup>
Sound Pressure Level	93 dB(A)
Sound Power Level	104 dB(A)
Dimensions (L x W x H)	173x82x225 mm (6-13/16"x3-1/4"x8-7/8")
Net weight	1.5 kg (3.2 lbs)

### Cordless Driver Drill

18V Li-Ion 1.5Ah

#### M6301DB 13 mm (1/2")

18V Li-Ion Cordless 13 mm (1/2") 38 N-m (340 in.lbs.) Driver Drill, G-Battery



Charger, Battery

Capacity	Steel: 13 mm (1/2") Wood: 36 mm (1-7/16")
No Load Speed (RPM)	High / Low: 0 - 1,400 / 0 - 400
Max Fastening Torque	Hard / Soft: 42 / 24 N-m (370 / 210 in.lbs.)
Max lock torque	38 N-m (340 in.lbs.)
Vibration Level	Drilling Into Metal: 2.5 m/s <sup>2</sup> or less
Sound Pressure Level	70 dB(A) or less
Dimensions (L x W x H)	223x82x239 mm (8-3/4"x3-1/4"x9-3/8")
Net weight	1.7 kg (3.7 lbs)

### Cordless Hammer Driver Drill

18V Li-Ion 1.5Ah


#### M8301DB

Compact and lightweight cordless hammer driver drill powered by 18V 1.3Ah Li-ion battery BL1813G



Charger, Battery

Capacity	Masonry: 13 mm (1/2") Steel: 13 mm (1/2") Wood: 36 mm (1-7/16")
Blows Per Minute (BPM)	High: 0 - 21,000 Low: 0 - 6,000
No Load Speed (RPM)	High: 0 - 1,400 Low: 0 - 400
Max Fastening Torque	Hard / Soft: 42 / 24 N-m (370 / 210 in.lbs.)
Max lock torque	38 N-m (340 in.lbs.)
Vibration Level	Hammer Drilling Into Concrete: 8.0 m/s <sup>2</sup> Drilling Into Metal: 2.5 m/s <sup>2</sup>
Sound Pressure Level	82 dB(A)
Sound Power Level	93 dB(A)
Dimensions (L x W x H)	238x82x239 mm (9-3/8"x3-1/4"x9-3/8")
Net weight	1.7 kg (3.8 lbs)

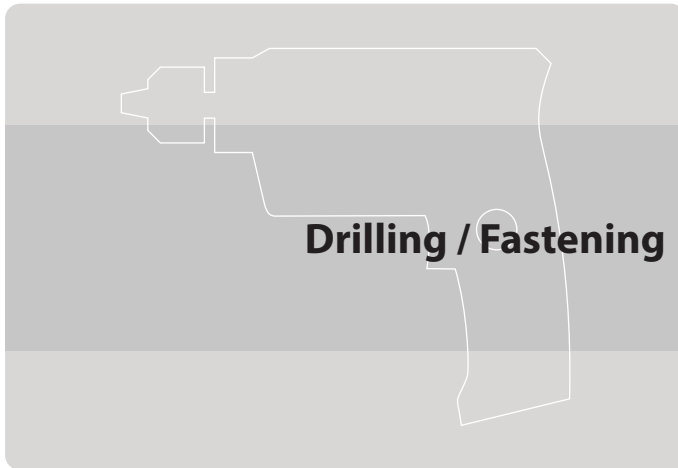

### High Speed Drill

#### M6501B 6.5 mm (1/4")

85

6.5 mm (1/4") 230 W High Speed Variable Speed Reversing Drill with Keyed Chuck



Chuck Key, Chuck Key Holder, Depth Gauge (country-specific), Cap (country-specific)

Continuous rating input	230W
Capacity	Steel: 6.5 mm (1/4") Wood: 9 mm (11/32")
No Load Speed (RPM)	0 - 4,500
Vibration Level	Drilling Into Metal: 3.0 m/s <sup>2</sup>
Sound Pressure Level	70 dB(A)
Dimensions (L x W x H)	203x63x171 mm (8"x2-1/2"x6-3/4")
Net weight	0.95 kg (2.1 lbs)
Power supply cord	2.0 m (6.6 ft.)

### High Speed Drill

#### M6500B 6.5 mm (1/4")

64

6.5 mm (1/4") 230 W High Speed Drill with Keyed Chuck



Chuck Key, Chuck Key Holder, Depth Gauge (country-specific), Cap (country-specific)

Continuous rating input	230W
Capacity	Steel: 6.5 mm (1/4") Wood: 9 mm (11/32")
No Load Speed (RPM)	4,500
Vibration Level	Drilling Into Metal: 2.5 m/s <sup>2</sup>
Sound Pressure Level	72 dB(A)
Dimensions (L x W x H)	200x63x164 mm (7-7/8"x2-1/2"x6-1/2")
Net weight	0.92 kg (2.0 lbs)
Power supply cord	2.0 m (6.6 ft.)

### Drill

#### M6200B 13 mm (1/2")

303

13 mm (1/2") 800 W Variable Speed Drill with Keyed Chuck



Chuck Key, Top Grip, Chuck Key Holder

Continuous rating input	800W
Capacity	Steel: 13 mm (1/2") Wood: 36 mm (1-7/16")
No Load Speed (RPM)	0 - 700
Vibration Level	Drilling Into Metal: 2.5 m/s <sup>2</sup> or less
Sound Pressure Level	84 dB(A)
Sound Power Level	95 dB(A)
Dimensions (L x W x H)	267x86x388 mm (10-1/2"x3-3/8"x15-1/4")
Net weight	2.7 - 2.8 kg (6.0 - 6.2 lbs)
Power supply cord	2.0 m (6.6 ft.)

### Drill

**M6201B** 13 mm (1/2")  
13 mm (1/2") 750 W Reversing Drill with Keyed Chuck

303



Continuous rating input	750W
Capacity	Steel: 13 mm (1/2") Wood: 36 mm (1-7/16")
No Load Speed (RPM)	600
Vibration Level	Drilling Into Metal: 2.5 m/s <sup>2</sup> or less
Sound Pressure Level	82 dB(A)
Sound Power Level	93 dB(A)
Dimensions (L x W x H)	267x86x396 mm (10-1/2"x3-3/8"x15-5/8")
Net weight	2.7 - 2.8 kg (6.0 - 6.2 lbs)
Power supply cord	2.0 m (6.6 ft.)



Chuck Key, Top Grip, Chuck Key Holder

### Drill

**M6202B** 13 mm (1/2")  
13 mm (1/2") 580 W Drill with Keyed Chuck

64



Continuous rating input	580W
Capacity	Steel: 13 mm (1/2") Wood: 25 mm (1")
No Load Speed (RPM)	2,000
Dimensions (L x W x H)	283x69x178 mm (11-1/8"x2-3/4"x7")
Net weight	2.0 kg (4.4 lbs.)
Power supply cord	2.0 m (6.6 ft.)



Side Grip, Chuck Key, Chuck Key Holder

### Drill

**M6002B** 10 mm (3/8")  
10 mm (3/8") 450 W Variable Speed Reversing Drill with Keyless Chuck

85



Continuous rating input	450W
Capacity	Steel: 10 mm (3/8") Wood: 25 mm (1")
No Load Speed (RPM)	0 - 3,000
Vibration Level	Drilling Into Metal: 3.0 m/s <sup>2</sup>
Sound Pressure Level	77 dB(A)
Dimensions (L x W x H)	234x64x175 mm (9-1/4"x2-1/2"x6-7/8")
Net weight	1.3 kg (2.9 lbs)
Power supply cord	2.0 m (6.6 ft.)



Chuck Key

### Drill

**M6001B** 10 mm (3/8")  
10 mm (3/8") 450 W Variable Speed Reversing Drill with Keyed Chuck

85



Continuous rating input	450W
Capacity	Steel: 10 mm (3/8") Wood: 25 mm (1")
No Load Speed (RPM)	0 - 3,000
Vibration Level	Drilling Into Metal: 3.0 m/s <sup>2</sup>
Sound Pressure Level	77 dB(A)
Dimensions (L x W x H)	229x64x175 mm (9"x2-1/2"x6-7/8")
Net weight	1.3 kg (2.9 lbs)
Power supply cord	2.0 m (6.6 ft.)



Chuck Key

### Drill

**M6000B** 10 mm (3/8")  
10 mm (3/8") 450 W Drill with Keyed Chuck

85



Continuous rating input	450W
Capacity	Steel: 10 mm (3/8") Wood: 25 mm (1")
No Load Speed (RPM)	3,000
Vibration Level	Drilling Into Metal: 3.0 m/s <sup>2</sup>
Sound Pressure Level	77 dB(A)
Dimensions (L x W x H)	229x64x175 mm (9"x2-1/2"x6-7/8")
Net weight	1.3 kg (2.8 lbs.)
Power supply cord	2.0 m (6.6 ft.)



Chuck Key

### Drill

**M6000B** 10 mm (3/8")  
10 mm (3/8") 350 W Variable Speed Reversing Drill with Keyed Chuck

64



Continuous rating input	350W
Capacity	Steel: 10 mm (3/8") Wood: 20 mm (13/16")
No Load Speed (RPM)	0 - 3,000
Vibration Level	Drilling Into Metal: 3.0 m/s <sup>2</sup>
Sound Pressure Level	77 dB(A)
Dimensions (L x W x H)	230x66x176 mm (9"x2-5/8"x6-15/16")
Net weight	1.2 kg (2.6 lbs)
Power supply cord	2.0 m (6.6 ft.)



Chuck Key, Chuck Key Holder

### Mixer

**M6600B**  
165 mm (6-1/2") 800 W Variable Speed Mixer


303



Continuous rating input	800W
Blade Diameter	165 mm (6-1/2")
No Load Speed (RPM)	0 - 700
Vibration Level	2.5 m/s <sup>2</sup> or less
Sound Pressure Level	85 dB(A)
Sound Power Level	96 dB(A)
Dimensions (L x W x H)	280x86x388 mm (11"x3-3/8"x15-1/4")
Net weight	2.6 - 2.7 kg (5.7 - 5.9 lbs)
Power supply cord	2.0 m (6.6 ft.)



Mixing Blade, Shaft (country-specific), Top Grip (country-specific), D-Handle (country-specific), Wrenches

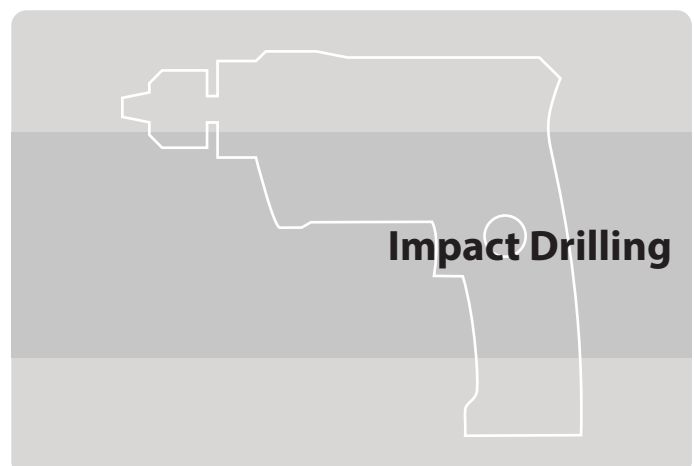

### Combination Hammer

**M8701B** 26 mm (1"), Adapted for SDS-PLUS bits  
26 mm (1") 2.3 J Combination Hammer, SDS-PLUS bits

459



Continuous rating input	800W
Impact Energy	EPTA-Procedure 05/2009: 2.3 J
Capacity	Concrete: 26 mm (1") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4")
Blows Per Minute (BPM)	0 - 4,500
No Load Speed (RPM)	0 - 1,200
Vibration Level	Hammer Drilling Into Concrete: 16.5 m/s <sup>2</sup> Drilling Into Metal: 2.5 m/s <sup>2</sup> or less
Sound Pressure Level	90 dB(A)
Sound Power Level	101 dB(A)
Dimensions (L x W x H)	362x71x194 mm (14-1/4"x2-13/16"x7-5/8")
Net weight	2.7 - 3.1 kg (6.0 - 6.8 lbs)
Power supply cord	4.0 m (13.1 ft)



Side Grip, Depth Gauge, Bit (country-specific)

### Rotary Hammer

**M8700B** 22 mm (7/8"), Adapted for SDS-PLUS bits  
22 mm (7/8") 1.9 J Rotary Hammer, SDS-PLUS Bits

459



Continuous rating input	710W
Impact Energy	EPTA-Procedure 05/2009: 1.9 J
Capacity	Concrete: 22 mm (7/8") Steel: 13 mm (1/2") Wood: 32 mm (1-1/4")
Blows Per Minute (BPM)	0 - 4,350
No Load Speed (RPM)	0 - 1,100
Vibration Level	Hammer Drilling Into Concrete: 15.5 m/s <sup>2</sup> Drilling Into Metal: 3.0 m/s <sup>2</sup>
Sound Pressure Level	90 dB(A)
Sound Power Level	101 dB(A)
Dimensions (L x W x H)	362x71x194 mm (14-1/4"x2-13/16"x7-5/8")
Net weight	2.5 - 2.9 kg (5.6 - 6.4 lbs)
Power supply cord	4.0 m (13.1 ft)



Side Grip, Depth Gauge

### Hammer Drill

**M8101B / M8100B** 16 mm (5/8")  
16 mm (5/8") 710 W Hammer Drill with Keyless Chuck (M8101B) / Keyed Chuck (M8100B)

85



Continuous rating input	710W
Capacity	Concrete: 16 mm (5/8") Steel: 13 mm (1/2") Wood: 30 mm (1-3/16")
Blows Per Minute (BPM)	0 - 48,000
No Load Speed (RPM)	0 - 3,200
Vibration Level	Hammer Drilling Into Concrete: 16.5 m/s <sup>2</sup> Drilling Into Metal: 3.0 m/s <sup>2</sup>
Sound Pressure Level	98 dB(A)
Sound Power Level	109 dB(A)
Dimensions (L x W x H)	M8101B: 295x77x202 mm (11-5/8"x3"x8") M8100B: 296x77x202 mm (11-5/8"x3"x8")
Net weight	M8100B: 2.0 kg (4.4 lbs) M8101B: 2.0 kg (4.4 lbs)
Power supply cord	M8100B: 2.1 m (6.9 ft) M8101B: 2.0 m (6.6 ft)



Side Grip, Depth Gauge (country-specific), Chuck Key (M8100B)

### Hammer Drill

**M0801B** 16 mm (5/8")  
16 mm (5/8") 500 W Variable Speed Reversing Hammer Drill with Keyed Chuck

85



Continuous rating input	500W
Capacity	Concrete: 16 mm (5/8") Steel: 13 mm (1/2") Wood: 20 mm (13/16")
Blows Per Minute (BPM)	0 - 48,000
No Load Speed (RPM)	0 - 3,200
Vibration Level	Hammer Drilling Into Concrete: 14.5 m/s <sup>2</sup> Drilling Into Metal: 4.0 m/s <sup>2</sup>
Sound Pressure Level	94 dB(A)
Sound Power Level	105 dB(A)
Dimensions (L x W x H)	261x69x195 mm (10-1/4"x2-3/4"x7-5/8")
Net weight	1.7 kg (3.7 lbs)
Power supply cord	2.0 m (6.6 ft)



Side Grip, Chuck Key, Chuck Key Holder

### Hammer Drill

**M8104B / M8103B** 13 mm (1/2")  
13 mm (1/2") 430 W Variable Speed Reversing Hammer Drill with Keyless Chuck (M8104B) / Keyed Chuck (M8103B)

85



Continuous rating input	430W
Capacity	Concrete: 13 mm (1/2") / Steel: 13 mm (1/2") Wood: 18 mm (11/16")
Blows Per Minute (BPM)	0 - 33,000
No Load Speed (RPM)	0 - 3,000
Vibration Level	Hammer Drilling Into Concrete: 19.5 m/s <sup>2</sup> Drilling Into Metal: 3.5 m/s <sup>2</sup>
Sound Pressure Level	90 dB(A)
Sound Power Level	101 dB(A)
Dimensions (L x W x H)	M8104B: 258x72x193 mm (10-1/8"x2-13/16"x7-5/8") M8103B: 255x72x193 mm (10"x2-13/16"x7-5/8")
Net weight	M8104B: 1.7 kg (3.7 lbs) M8103B: 1.8 kg (3.9 lbs)
Power supply cord	2.0 m (6.6 ft)



Side Handle, Depth Gauge (country-specific), Chuck Key (M8103B), Chuck Key Holder (M8103B)

### Hammer Drill

**M0800B** 10 mm (3/8")  
10 mm (3/8") 500 W Variable Speed Reversing Hammer Drill with Keyed Chuck

85



Continuous rating input	500W
Capacity	Concrete: 10 mm (3/8") Steel: 10 mm (3/8") Wood: 20 mm (13/16")
Blows Per Minute (BPM)	0 - 48,000
No Load Speed (RPM)	0 - 3,200
Dimensions (L x W x H)	254x69x195 mm (10"x2-3/4"x7-5/8")
Net weight	1.6 kg (3.4 lbs)
Power supply cord	2.0 m (6.6 ft)



Side Grip, Chuck Key, Chuck Key Holder

### Demolition Hammer

**M8600B** 11/16": 17 mm Hex Shank  
7.2 J Demolition Hammer, accepts 17 mm Hex Shank Bits

105



Continuous rating input	900W
Impacts Per Minute (IPM)	2,900
Impact Energy	7.2 J
Sound Pressure Level	95 dB(A)
Sound Power Level	106 dB(A)
Dimensions (L x W x H)	406x99x232 mm (16"x3-7/8"x9-1/8")
Net weight	5.4 kg (12 lbs)
Power supply cord	2.5 m (8.2 ft)



Bull Point, Side Grip, Bit Grease, Cleaning cloth





# Cutting

## Portable Cut-off

**M2403B** 355 mm (14")  
355 mm (14") 2,200 W Portable Cut-Off

203

**new**



Continuous rating input	2,200W
Wheel Diameter	355 mm (14")
No Load Speed (RPM)	3,800
Capacity at 90°	Round: 127 mm (5") Rectangular: 102x194 mm (4"x7-5/8") Rectangular: 70x233 mm (2-3/4"x9-1/8")
Capacity at 45°	Round: 127 mm (5") Rectangular: 115x103 mm (4-1/2"x4-1/16")
Vibration Level	3.5 m/s <sup>2</sup>
Sound Pressure Level	99 dB(A)
Sound Power Level	109 dB(A)
Dimensions (L x W x H)	500x280x620 mm (19-3/4"x11"x24-3/8")
Net weight	14.3 kg (31.5 lbs.)
Power supply cord	2.0 m (6.6 ft.)



Abrasive Cut-Off Wheel, Hex Wrench

## Portable Cut-off

**M2402B** 355 mm (14")  
355 mm (14") 2,200 W Portable Cut-Off

203

**new**



Continuous rating input	2,200W
Wheel Diameter	355 mm (14")
No Load Speed (RPM)	3,800
Capacity at 90°	Round: 127 mm (5") Rectangular: 102x194 mm (4"x7-5/8") Rectangular: 70x233 mm (2-3/4"x9-1/8")
Capacity at 45°	Round: 127 mm (5") Rectangular: 115x103 mm (4-1/2"x4-1/16")
Vibration Level	4.5 m/s <sup>2</sup>
Sound Pressure Level	98 dB(A)
Sound Power Level	108 dB(A)
Dimensions (L x W x H)	490x280x610 mm (19-1/4"x11"x24")
Net weight	14.5 kg (32.0 lbs.)
Power supply cord	2.0 m (6.6 ft.)



Abrasive Cut-Off Wheel, Hex Wrench

## Portable Cut-off

**M2401B** 355 mm (14")  
355 mm (14") 2,000 W Portable Cut-Off

203



Continuous rating input	2,000W
Wheel Diameter	355 mm (14")
No Load Speed (RPM)	3,800
Capacity at 90°	Round: 127 mm (5") Rectangular: 102x194 mm (4"x7-5/8") Rectangular: 70x233 mm (2-3/4"x9-1/8")
Capacity at 45°	Round: 127 mm (5") Rectangular: 115x103 mm (4-1/2"x4-1/16")
Vibration Level	3.0 m/s <sup>2</sup>
Sound Pressure Level	100 dB(A)
Sound Power Level	111 dB(A)
Dimensions (L x W x H)	500x280x620 mm (19-3/4"x11"x24-3/8")
Net weight	13.7 kg (30.2 lbs.)
Power supply cord	2.5 m (8.2 ft.)



Abrasive Cut-Off Wheel, Hex Wrench

## Portable Cut-off

**M2400B** 355 mm (14")  
355 mm (14") 2,000 W Portable Cut-Off

203



Continuous rating input	2,000W
Wheel Diameter	355 mm (14")
No Load Speed (RPM)	3,800
Capacity at 90°	Round: 115 mm (4-1/2") Rectangular: 102x194 mm (4"x7-5/8") Rectangular: 70x233 mm (2-3/4"x9-1/8")
Capacity at 45°	Round: 115 mm (4-1/2") Rectangular: 115x103 mm (4-1/2"x4-1/16")
Vibration Level	3.5 m/s <sup>2</sup>
Sound Pressure Level	99 dB(A)
Sound Power Level	110 dB(A)
Dimensions (L x W x H)	500x280x620 mm (19-3/4"x11"x24-3/8")
Net weight	15.7 kg (34.6 lbs.)
Power supply cord	2.5 m (8.2 ft.)



Abrasive Cut-Off Wheel, Socket Wrench

## Cutter

**M4101B** 125 mm (5")  
125 mm (5") 1,250 W Cutter, Dry / Wet Type (country-specific)

303



Continuous rating input	1,250W
Blade Diameter	125 mm (5")
Max Cutting Capacity	90°: 40 mm (1-9/16")
No Load Speed (RPM)	12,000
Vibration Level	Concrete Cutting: 5.0 m/s <sup>2</sup>
Sound Pressure Level	98 dB(A)
Sound Power Level	109 dB(A)
Dimensions (L x W x H)	233x216x166 mm (9-1/8"x8-1/2"x6-1/2")
Net weight	3.0 kg (6.7 lbs.)
Power supply cord	2.0 m (6.6 ft.)



Tube Holder (country-specific), Vinyl Tube (country-specific), Wrench, Hex Wrench

## Cutter

**M4100B** 110 mm (4-3/8")  
110 mm (4-3/8") 1,200 W Cutter, Dry / Wet Type (country-specific)

303



Continuous rating input	1,200W
Blade Diameter	110 mm (4-3/8")
Max Cutting Capacity	90°: 32 mm (1-1/4")
No Load Speed (RPM)	13,000
Vibration Level	Concrete Cutting: 5.5 m/s <sup>2</sup>
Sound Pressure Level	100 dB(A)
Sound Power Level	111 dB(A)
Dimensions (L x W x H)	227x209x166 mm (8-15/16"x8-1/4"x6-1/2")
Net weight	2.9 kg (6.4 lbs.)
Power supply cord	2.0 m (6.6 ft.)



Diamond Wheel (country-specific), Water Supply Pipe Set (country-specific), Wrench, Hex Wrench

## Cutter

**M0400B / M0401B** 110 mm (4-3/8")  
M0400B : 110 mm (4-3/8") 1,200 W Cutter  
M0401B : 110 mm (4-3/8") 1,200 W Cutter, Dry / Wet Type (country-specific)

303



Continuous rating input	1,200W
Blade Diameter	110 mm (4-3/8")
Max Cutting Capacity	90°: 32 mm (1-1/4")
No Load Speed (RPM)	13,000
Dimensions (L x W x H)	M0400B : 224x195x164 mm (8-7/8"x7-5/8"x6-1/2") M0401B : 231x195x164 mm (9-1/8"x7-5/8"x6-1/2")
Net weight	M0400B : 2.5 kg (5.5 lbs.) M0401B : 2.6 kg (5.7 lbs.)
Power supply cord	2.0 m (6.6 ft.)



Wrench, Hex Wrench, Tube Holder (M0401 only), Vinyl Tube (M0401 only)

# Grinding / Sanding

## Angle Grinder



### 850 W Angle Grinder, Slide Switch

325	M9509B	M9510B	M9511B
Continuous rating input	850W	850W	850W
Wheel Diameter	100 mm (4")	115 mm (4-1/2")	125 mm (5")
No Load Speed (RPM)	11,000	11,000	11,000
Vibration Level	Surface Grinding: 6.5 m/s <sup>2</sup>	Surface Grinding: 8.5 m/s <sup>2</sup>	Surface Grinding: 9.0 m/s <sup>2</sup>
Sound Pressure Level	87 dB(A)	88 dB(A)	89 dB(A)
Sound Power Level	98 dB(A)	99 dB(A)	100 dB(A)
Dimensions (L x W x H)	276x118x101 mm (10-7/8"x4-5/8"x4")	276x130x111 mm (10-7/8"x5-1/8"x4-3/8")	276x140x111 mm (10-7/8"x5-1/2"x4-3/8")
Net weight	1.8 kg (3.9 lbs)	2.0 kg (4.5 lbs)	2.0 kg (4.5 lbs)
Power supply cord	2.0 m (6.6 ft)	2.0 m (6.6 ft)	2.0 m (6.6 ft)

Side Grip, Lock Nut Wrench

## Angle Grinder



### 850 W Angle Grinder, Toggle Switch

325	M9513B
Continuous rating input	850W
Wheel Diameter	100 mm (4")
No Load Speed (RPM)	11,000
Dimensions (L x W x H)	273x118x101 mm (10-3/4"x4-5/8"x4")
Net weight	1.8 kg (4.0 lbs.)
Power supply cord	2.0 m (6.6 ft)

Side Grip, Lock Nut Wrench

## Angle Grinder



### 720 W Angle Grinder, Slide Switch

459	M9506B	M9507B	M9508B
Continuous rating input	720W	720W	720W
Wheel Diameter	100 mm (4")	115 mm (4-1/2")	125 mm (5")
No Load Speed (RPM)	11,000	11,000	11,000
Vibration Level	Surface Grinding: 6.5 m/s <sup>2</sup>	Surface Grinding: 7.0 m/s <sup>2</sup>	Surface Grinding: 7.0 m/s <sup>2</sup>
Sound Pressure Level	86 dB(A)	88 dB(A)	88 dB(A)
Sound Power Level	97 dB(A)	99 dB(A)	99 dB(A)
Dimensions (L x W x H)	261x118x101 mm (10-1/4"x4-5/8"x4")	261x130x111 mm (10-1/4"x5-1/8"x4-3/8")	261x140x111 mm (10-1/4"x5-1/2"x4-3/8")
Net weight	1.6 kg (3.6 lbs)	1.9 kg (4.1 lbs)	1.9 kg (4.1 lbs)
Power supply cord	2.0 m (6.6 ft)	2.0 m (6.6 ft)	2.0 m (6.6 ft)

Side Grip, Lock Nut Wrench

## Angle Grinder



### 720 W Angle Grinder, Toggle Switch

459	M9512B
Continuous rating input	720W
Wheel Diameter	100 mm (4")
No Load Speed (RPM)	11,000
Dimensions (L x W x H)	258x118x101 mm (10-1/8"x4-5/8"x4")
Net weight	1.6 kg (3.5 lbs.)
Power supply cord	2.0 m (6.6 ft)

Side Grip, Lock Nut Wrench

## Angle Grinder



### 710 W Angle Grinder, Toggle Switch

411	M9505B
Continuous rating input	710W
Wheel Diameter	100 mm (4")
No Load Speed (RPM)	11,000
Dimensions (L x W x H)	266x118x96 mm (10-1/2"x4-5/8"x3-3/4")
Net weight	1.8 kg (4.0 lbs.)
Power supply cord	2.0 m (6.6 ft)

Lock Nut Wrench

## Angle Grinder



M9503RB only

### 570 W Angle Grinder, Slide Switch ( M9503RB : Anti-Restart Function )

411	M9501B	M9502B	M9503B	M9503RB
Continuous rating input	570W	570W	570W	570W
Wheel Diameter	100 mm (4")	115 mm (4-1/2")	125 mm (5")	125 mm (5")
No Load Speed (RPM)	11,000	11,000	11,000	11,000
Vibration Level	Surface Grinding: 5.5 m/s <sup>2</sup>	Surface Grinding: 6.5 m/s <sup>2</sup>	Surface Grinding: 6.5 m/s <sup>2</sup>	Surface Grinding: 6.5 m/s <sup>2</sup>
Sound Pressure Level	82 dB(A)	83 dB(A)	84 dB(A)	84 dB(A)
Sound Power Level	93 dB(A)	94 dB(A)	95 dB(A)	95 dB(A)
Dimensions (L x W x H)	270x118x104 mm (10-5/8"x4-5/8"x4-1/8")	270x130x110 mm (10-5/8"x5-1/8"x4-5/16")	270x140x110 mm (10-5/8"x5-1/2"x4-5/16")	281x140x110 mm (11-1/8"x5-1/2"x4-5/16")
Net weight	1.9 kg (4.1 lbs)	2.07 - 2.15 kg (4.56 - 4.74 lbs)	2.10 - 2.18 kg (4.63 - 4.81 lbs)	2.12 - 2.21 kg (4.67 - 4.87 lbs)
Power supply cord	2.0 m (6.6 ft)	2.0 m (6.6 ft)	2.0 m (6.6 ft)	2.0 m (6.6 ft)

M9501B / M9502B / M9503B : Side Handle, Lock Nut Wrench

M9503RB : Lock Nut Wrench, Side Grip

## Angle Grinder



### 570 W Angle Grinder, Toggle Switch

<b>411</b>	<b>M9504B</b>
Continuous rating input	570W
Wheel Diameter	100 mm (4")
No Load Speed (RPM)	12,000
Dimensions (L x W x H)	256x118x92 mm (10-1/8"x4-5/8"x3-5/8")
Net weight	1.8 kg (4.0 lbs)
Power supply cord	2.0 m (6.6 ft)

Lock Nut Wrench

## Angle Grinder



### 540 W Angle Grinder, Slide Switch

<b>459</b>	<b>M0900B</b>	<b>M0901B</b>
Continuous rating input	540W	540W
Wheel Diameter	100 mm (4")	115 mm (4-1/2")
No Load Speed (RPM)	12,000	12,000
Vibration Level	-	Surface Grinding: 8.0 m/s <sup>2</sup>
Sound Pressure Level	-	90 dB(A)
Sound Power Level	-	101 dB(A)
Dimensions (L x W x H)	251x118x97 mm (9-7/8"x4-5/8"x3-13/16")	251x130x106 mm (9-7/8"x5-1/8"x4-3/16")
Net weight	1.65 kg (3.64 lbs)	1.75 - 1.81 kg (3.86 - 3.99 lbs)
Power supply cord	2.0 m (6.6 ft)	2.0 m (6.6 ft)

Lock Nut Wrench, Side Grip

## Angle Grinder



### 540 W Angle Grinder, Toggle Switch

<b>459</b>	<b>M0910B</b>
Continuous rating input	540W
Wheel Diameter	100 mm (4")
No Load Speed (RPM)	12,000
Dimensions (L x W x H)	251x118x93 mm (9-7/8"x4-5/8"x3-5/8")
Net weight	1.64 kg (3.62 lbs)
Power supply cord	2.0 m (6.6 ft)

Lock Nut Wrench

## Angle Grinder



### 1,050 W Angle Grinder, Finger Trigger Switch

<b>303</b>	<b>M9002B</b>	<b>M9003B</b>
Continuous rating input	1,050W	1,050W
Wheel Diameter	125 mm (5")	150 mm (6")
No Load Speed (RPM)	11,000	10,000
Vibration Level	Surface Grinding: 9.0 m/s <sup>2</sup>	Surface Grinding: 9.0 m/s <sup>2</sup>
Sound Pressure Level	91 dB(A)	90 dB(A)
Sound Power Level	102 dB(A)	101 dB(A)
Dimensions (L x W x H)	361x140x124 mm (14-1/4"x5-1/2"x4-7/8")	361x171x124 mm (14-1/4"x6-3/4"x4-7/8")
Net weight	2.8 kg (6.1 lbs.)	2.8 - 2.9 kg (6.2 - 6.3 lbs)
Power supply cord	2.0 m (6.6 ft.)	2.0 m (6.6 ft.)

Side Grip, Lock Nut Wrench

## Angle Grinder



### 2,000 W Angle Grinder, Large Trigger Switch

<b>204</b>	<b>M9001B</b>
Continuous rating input	2,000W
Wheel Diameter	230 mm (9")
No Load Speed (RPM)	6,600
Vibration Level	Surface Grinding: 5.0 m/s <sup>2</sup>
Sound Pressure Level	90 dB(A)
Sound Power Level	101 dB(A)
Dimensions (L x W x H)	466x250x138 mm (18-3/8"x9-7/8"x5-7/16")
Net weight	5.6 - 7.9 kg (12.42 - 17.41 lbs)
Power supply cord	2.0 m (6.6 ft.)

Side Grip, Lock Nut Wrench

## Angle Grinder



### 2,200 W Angle Grinder, Finger Trigger Switch

<b>203</b>	<b>M0920B</b>	<b>M0921B</b>
Continuous rating input	2,200W	2,200W
Wheel Diameter	180 mm (7")	230 mm (9")
No Load Speed (RPM)	8,500	6,600
Vibration Level	Surface Grinding: 6.5 m/s <sup>2</sup>	Surface Grinding: 5.5 m/s <sup>2</sup>
Sound Pressure Level	91 dB(A)	91 dB(A)
Sound Power Level	102 dB(A)	102 dB(A)
Dimensions (L x W x H)	439x200x141 mm (17-1/4"x7-7/8"x5-9/16")	439x250x141 mm (17-1/4"x9-7/8"x5-9/16")
Net weight	5.0 kg (11.0 lbs)	5.3 kg (11.6 lbs)
Power supply cord	2.0 m (6.6 ft)	2.0 m (6.6 ft)

Lock Nut Wrench, Side Grip



## Die Grinder

**M9100B** 6 mm (1/4")  
6 mm (1/4") Toggle Switch High Speed Die Grinder

411



Continuous rating input	480W
Capacity	Collet : 6 mm or 1/4"
Max Wheel Diameter	20 mm (13/16")
No Load Speed (RPM)	33,000
Vibration Level	Surface Grinding: 2.5 m/s <sup>2</sup>
Dimensions (L x W x H)	350x75x75 mm (13-3/4"x2-15/16"x2-15/16")
Net weight	1.4 kg (3.1 lbs)
Power supply cord	2.0 m (6.6 ft)



Wrench

## Multi Tool

**M9800B**  
200W Multi Tool

459



Continuous rating input	200W
Oscillations Per Minute (OPM)	15,000 - 22,000
Oscillation Angle	Left / Right / Total: 1.6° / 1.6° / 3.2°
Circumference of Grip Portion	195 mm (7-5/8")
Vibration Level	Sanding: 2.5 m/s <sup>2</sup> Cutting w/ Plunge Cut Saw Blade: 8.0 m/s <sup>2</sup> Cutting w/ Segmental Saw Blade: 4.0 m/s <sup>2</sup> Scraping: 9.5 m/s <sup>2</sup>
Sound Pressure Level	Sanding: 78 dB(A) Cutting w/ Plunge Cut Saw Blade: 79 dB(A) Cutting w/ Segmental Saw Blade: 79 dB(A) Scraping: 78 dB(A)
Dimensions (L x W x H)	283x68x98 mm (11-1/8"x2-11/16"x3-7/8")
Net weight	1.2 - 1.3 kg (2.7 - 3.0 lbs.)
Power supply cord	2.0 m (6.6 ft)



Oscillating Multi Tool Accessories, Hex Wrench, Dust Attachment (country-specific)

## Belt Sander

**M9400B** 100 mm (4")  
100 mm x 610 mm (4" x 24") 940 W Belt Sander

153



Continuous rating input	940W
Belt Size	100 x 610 mm (4" x 24")
Belt Speed	380 m/min (1,250 ft/min)
Vibration Level	Sanding Metal Plate: 2.5 m/s <sup>2</sup> or less
Sound Pressure Level	87 dB(A)
Sound Power Level	98 dB(A)
Dimensions (L x W x H)	354x175x169 mm (14"x6-7/8"x6-5/8")
Net weight	6.2 kg (13.8 lbs)
Power supply cord	2.0 m (6.6 ft)



Abrasive Belt, Dust Bag, Carbon Plate, Step

## Finishing Sander

**M9200B**  
1/4 Sheet 180 W Finishing Sander

419



Continuous rating input	180W
Pad Size	112 x 102 mm (4-3/8" x 4")
Abrasive Paper Size	114 x 140 mm (4-1/2" x 5-1/2")
Orbits Per Minute (OPM)	14,000
Vibration Level	Sanding Metal Plate: 4.5 m/s <sup>2</sup>
Sound Pressure Level	79 dB(A)
Dimensions (L x W x H)	110x112x133 mm (4-5/16"x4-3/8"x5-1/4")
Net weight	0.9 kg (2 lbs)
Power supply cord	2.0 m (6.6 ft)



Abrasive paper x6

## Finishing Sander

**M9203B**  
1/3 Sheet 190 W Finishing Sander, Built-in Dust Extraction System

64



Continuous rating input	190W
Pad Size	92 x 185 mm (3-5/8" x 7-1/4")
Abrasive Paper Size	93 x 228 mm (3-5/8" x 9")
Orbits Per Minute (OPM)	12,000
Strokes Per Minute (SPM)	24,000
Orbit Diameter	2.0 mm (1/16")
Vibration Level	Sanding Metal Plate: 5.0 m/s <sup>2</sup>
Sound Pressure Level	75 dB(A)
Dimensions (L x W x H)	252x92x154 mm (9-7/8"x3-5/8"x6-1/16")
Net weight	1.4 kg (3.2 lbs)
Power supply cord	2.0 m (6.6 ft)



Abrasive Paper, Punch Plate, Dust Bag

## Finishing Sander

**M9201B**  
1/3 Sheet 180 W Finishing Sander

64



Continuous rating input	180W
Pad Size	93 x 185 mm (3-5/8" x 7-1/4")
Abrasive Paper Size	93 x 228 mm (3-5/8" x 9")
Orbits Per Minute (OPM)	12,000
Vibration Level	Sanding Metal Plate: 6 m/s <sup>2</sup>
Vibration K Factor	Sanding Metal Plate: 1.5 m/s <sup>2</sup>
Sound Pressure Level	74 dB(A)
Dimensions (L x W x H)	214x92x147 mm (8-3/8"x3-5/8"x5-3/4")
Net weight	1.4 kg (3.1 lbs)
Power supply cord	2.0 m (6.6 ft)



Abrasive Paper

## Random Orbit Sander

**M9204B** 125 mm (5")  
125 mm (5") 240 W Random Orbit Sander with Built-In Dust Extraction System

419



Continuous rating input	240W
Pad Size	123 mm (4-7/8")
Abrasive Paper Size	125 mm (5")
Orbits Per Minute (OPM)	12,000
Strokes Per Minute (SPM)	24,000
Orbit Diameter	2.8 mm (1/8")
Vibration Level	Sanding Metal Plate: 3.0 m/s <sup>2</sup>
Sound Pressure Level	81 dB(A)
Sound Power Level	92 dB(A)
Dimensions (L x W x H)	153x123x144 mm (6"x4-7/8"x5-5/8")
Net weight	1.2 kg (2.6 lbs)
Power supply cord	2.0 m (6.6 ft)



Dust Bag, Abrasive Paper

## Random Orbit Sander

**M9202B**  
125 mm (5") 240 W Random Orbit Sander

419



Continuous rating input	240W
Pad Size	123 mm (4-7/8")
Abrasive Disc Size	125 mm (5")
Orbits Per Minute (OPM)	12,000
Strokes Per Minute (SPM)	24,000
Orbit Diameter	2.8 mm (1/8")
Dimensions (L x W x H)	127x123x142 mm (5"x4-7/8"x5-5/8")
Net weight	1.2 kg (2.6 lbs)
Power supply cord	2.0 m (6.6 ft)



Abrasive Disc



## Compound Miter Saw

**M2300B** 255 mm (10") 23000123   
 255 mm (10") 1,500 W Compound Miter Saw



Continuous rating input	1,500W
Blade Diameter	255 mm (10")
Miter Angle	45° L / 45° R
Bevel Angle	45° L
Max Cutting Capacity	90° Miter: 75 x 130 mm (2-15/16" x 5-1/8") 45° Miter, L/R: 75 x 90 mm (2-15/16" x 3-9/16")
No Load Speed (RPM)	4,200
Vibration Level	2.5 m/s <sup>2</sup> or less
Sound Pressure Level	92 dB(A)
Sound Power Level	105 dB(A)
Dimensions (L x W x H)	610x485x155 mm (24"x19-1/8"x20-1/4")
Net weight	14.7 kg (32.5 lbs)
Power supply cord	2.5 m (8.2 ft)



TCT Saw Blade, Dust Bag, Triangular Rule, Vertical Vise, Vise Assembly, Holder, Set Plate

## Circular Saw

**M5802B** 190 mm (7-1/2"), 185 mm (7-1/4") 303   
 190 mm (7-1/2") / 185 mm (7-1/4") 1,050 W Circular Saw



Continuous rating input	1,050W
Blade Diameter	190 / 185 mm (7-1/2" / 7-1/4")
Max Cutting Capacity	90°: 68 / 66 mm (2-11/16" / 2-5/8") 45°: 46 / 44 mm (1-13/16" / 1-3/4")
No Load Speed (RPM)	4,900
Vibration Level	Cutting Wood: 2.5 m/s <sup>2</sup> or less
Sound Pressure Level	95 dB(A)
Sound Power Level	106 dB(A)
Dimensions (L x W x H)	297x232x255 mm (11-3/4"x9-1/8"x10")
Net weight	3.8 kg (8.4 lbs)
Power supply cord	2.0 m (6.6 ft)



Dust nozzle: (Optional except for European countries)

TCT Saw Blade, Rip Fence (Guide Rule), Hex Wrench, Dust Nozzle (country-specific)

## Circular Saw

**M5801B** 185 mm (7-1/4") 303   
 185 mm (7-1/4") 1,050 W Circular Saw



Continuous rating input	1,050W
Blade Diameter	185 mm (7-1/4")
Max Cutting Capacity	90°: 66 mm (2-5/8") 45°: 44 mm (1-3/4")
No Load Speed (RPM)	4,900
Vibration Level	Cutting Wood: 2.5 m/s <sup>2</sup>
Dimensions (L x W x H)	284x231x243 mm (11-1/8"x9-1/8"x9-9/16")
Net weight	3.5 kg (7.7 lbs)
Power supply cord	2.0 m (6.6 ft)



TCT Saw Blade, Rip Fence (Guide Rule), Hex Wrench

## Jig Saw

**M4301B** 64   
 450 W Top Handle Jig Saw, 3 Orbital Settings Plus Straight Cutting



Continuous rating input	450W
Max Cutting Capacity at 90°	Wood: 65 mm (2-9/16") Steel: 6 mm (1/4")
Length of Stroke	18 mm (11/16")
Strokes Per Minute (SPM)	0 - 3,100
Vibration Level	Cutting Wood: 8.0 m/s <sup>2</sup> Cutting Sheet Metal: 5.0 m/s <sup>2</sup>
Sound Pressure Level	82 dB(A)
Sound Power Level	93 dB(A)
Dimensions (L x W x H)	214x75x202 mm (8-3/8"x2-15/16"x8")
Net weight	1.9 kg (4.1 lbs)
Power supply cord	2.0 m (6.6 ft)



Jig Saw Blade, Hex Wrench

## Jig Saw

**M4302B** 411   
 450 W Top Handle Variable Speed Jig Saw



Continuous rating input	450W
Max Cutting Capacity at 90°	Wood: 55 mm (2-3/16") Steel: 6 mm (1/4")
Length of Stroke	26 mm (1")
Strokes Per Minute (SPM)	0 - 3,100
Vibration Level	Cutting Boards: 6.5 m/s <sup>2</sup> Cutting Sheet Metal: 7.5 m/s <sup>2</sup>
Sound Pressure Level	88 dB(A)
Sound Power Level	99 dB(A)
Dimensions (L x W x H)	219x85x191 mm (8-5/8"x3-3/8"x7-1/2")
Net weight	2.5 kg (5.5 lbs.)
Power supply cord	2.0 m (6.6 ft)



Jig Saw Blade, Hex Wrench

## Recipro Saw

**M4501B** 303   
 1,010 W Recipro Saw



Continuous rating input	1,010W
Length of Stroke	28 mm (1-1/8")
Strokes Per Minute (SPM)	0 - 2,800
Capacity	Pipe: 130 mm (5-1/8") Wood: 255 mm (10")
Vibration Level	Cutting Boards: 19.5 m/s <sup>2</sup> Cutting Wooden Beams: 22.0 m/s <sup>2</sup>
Sound Pressure Level	87 dB(A)
Sound Power Level	98 dB(A)
Dimensions (L x W x H)	457x98x170 mm (18"x3-7/8"x6-11/16")
Net weight	3.2 kg (7 lbs)
Power supply cord	2.0 m (6.6 ft)



Recipro saw blade set (country-specific)

## Recipro Saw


**M4500B** 303   
 1,010 W Recipro Saw



Continuous rating input	1,010W
Length of Stroke	28 mm (1-1/8")
Strokes Per Minute (SPM)	0 - 2,800
Capacity	Pipe: 130 mm (5-1/8") Wood: 255 mm (10")
Vibration Level	Cutting Boards: 19.5 m/s <sup>2</sup> Cutting Wooden Beams: 22.0 m/s <sup>2</sup>
Sound Pressure Level	88 dB(A)
Sound Power Level	99 dB(A)
Dimensions (L x W x H)	457x98x174 mm (18"x3-7/8"x6-7/8")
Net weight	3.1 kg (6.9 lbs)
Power supply cord	2.0 m (6.6 ft)



Recipro saw blade set (country-specific), Hex Wrench

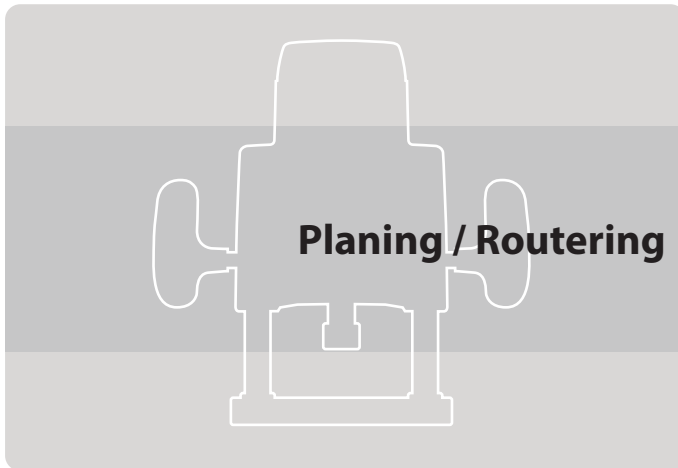

### Planer

**M1100B** 82 mm (3-1/4")  
82 mm (3-1/4") 750 W Planer

303



Continuous rating input	750W
Planing Width	82 mm (3-1/4")
Planing Depth	3 mm (1/8")
Max Shiplapping	20 mm (3/4")
No Load Speed (RPM)	18,000
Vibration Level	Planing Softwood: 2.5 m/s <sup>2</sup> or less
Sound Pressure Level	91 dB(A)
Sound Power Level	102 dB(A)
Dimensions (L x W x H)	390x175x140 mm (15-3/8"x6-7/8"x5-1/2")
Net weight	4.6 kg (10.2 lbs.)
Power supply cord	2.0 m (6.6 ft.)



Planer Blade, Sharpening Holder Assembly (for resharpenable blade), Blade Gauge, Socket Wrench, Guide Rule

### Power Planer

**M1901B** 82 mm (3-1/4")  
82 mm (3-1/4") 500 W Power Planer

411



Continuous rating input	500W
Planing Width	82 mm (3-1/4")
Planing Depth	2 mm (1/16")
Max Shiplapping	9 mm (11/32")
No Load Speed (RPM)	16,000
Vibration Level	Planing Softwood: 3.5 m/s <sup>2</sup>
Sound Pressure Level	85 dB(A)
Sound Power Level	96 dB(A)
Dimensions (L x W x H)	285x157x160 mm (11-1/4"x6-3/16"x6-5/16")
Net weight	2.8 - 2.9 kg (6.1 - 6.4 lbs)
Power supply cord	2.0 m (6.6 ft)



Planer Blade, Sharpening Holder Assembly (for resharpenable blade), Blade Gauge, Socket Wrench, Guide Rule (country-specific), Dressing Stone (country-specific), Dust Nozzle (country-specific)

### Planer

**M1902B** 82 mm (3-1/4")  
82 mm (3-1/4") 500 W Planer

411



Continuous rating input	500W
Planing Width	82 mm (3-1/4")
Planing Depth	1 mm (1/32")
Max Shiplapping	9 mm (11/32")
No Load Speed (RPM)	16,000
Vibration Level	Planing Softwood: 3.0 m/s <sup>2</sup>
Sound Pressure Level	84 dB(A)
Sound Power Level	95 dB(A)
Dimensions (L x W x H)	285x157x160 mm (11-1/4"x6-3/16"x6-5/16")
Net weight	2.6 - 2.7 kg (5.7 - 6.0 lbs)
Power supply cord	2.0 m (6.6 ft)



Planer Blade, Sharpening Holder Assembly (for resharpenable blade), Blade Gauge, Hex Wrench, Guide Rule (country-specific), Dressing Stone (country-specific)

### Trimmer

**M3701B** 6 mm (1/4")  
6 mm (1/4") 530 W Fixed Base Trimmer

411



Continuous rating input	530W
Collet Capacity	6 mm or 1/4"
No Load Speed (RPM)	35,000
Plunge Capacity	0 - 42 mm (0 - 1-5/8")
Dimensions (L x W x H)	82x90x199 mm (3-1/4"x3-1/2"x7-7/8")
Net weight	1.6 kg (3.4 lbs.)
Power supply cord	2.0 m (6.6 ft.)

Trimmer Guide, Straight Guide Assembly, Templet Guide, Straight Bit, Chip Deflector, Wrench x2

### Trimmer

**M3700B** 6 mm (1/4")  
6 mm (1/4") 530 W Fixed Base Trimmer

411



Continuous rating input	530W
Collet Capacity	6 mm or 1/4"
No Load Speed (RPM)	35,000
Plunge Capacity	0 - 42 mm (0 - 1-5/8")
Vibration Level	Rotation without Load: 2.5 m/s <sup>2</sup> or less
Sound Pressure Level	83 dB(A)
Sound Power Level	94 dB(A)
Dimensions (L x W x H)	82x90x199 mm (3-1/4"x3-1/2"x7-7/8")
Net weight	1.4 kg (3.1 lbs.)
Power supply cord	2.0 m (6.6 ft.)



Trimmer Guide, Straight Guide Assembly, Templet Guide, Straight Bit, Chip Deflector, Wrench x2

### Router

**M3600B** 12 mm (1/2")  
12 mm (1/2") 1,650 W Plunge Router

211



Continuous rating input	1,650W
Collet Capacity	12 mm or 1/2"
Plunge Capacity	0 - 60 mm (0 - 2-3/8")
No Load Speed (RPM)	22,000
Vibration Level	Cutting Grooves in MDF: 2.5 m/s <sup>2</sup>
Sound Pressure Level	86 dB(A)
Sound Power Level	97 dB(A)
Dimensions (L x W x H)	284x148x300 mm (11-1/8"x5-7/8"x11-3/4")
Net weight	5.5 kg (12.2 lbs.)
Power supply cord	2.0 m (6.6 ft.)



Straight Guide, Templet Guide, Trimmer Guide, Guide Holder, Collet Sleeve x2, Straight Bit, Wrench, Dust Nozzle (country-specific), Dust Cover (For tool with the knob)

### Router (Plunge type)

**M3601B** 6 mm, 8 mm, 1/4", 3/8"  
6 mm, 8 mm, 1/4", 3/8" 900 W Plunge Router


106



Continuous rating input	900W
Collet Capacity	6 mm, 8 mm or 1/4", 3/8"
Plunge Capacity	0 - 35 mm (0 - 1-3/8")
No Load Speed (RPM)	27,000
Vibration Level	Cutting Grooves in MDF: 7.5 m/s <sup>2</sup>
Sound Pressure Level	91 dB(A)
Sound Power Level	102 dB(A)
Dimensions (L x W x H)	256x110x218 mm (10-1/8"x4-5/16"x8-5/8")
Net weight	2.7 kg (6.0 lbs)
Power supply cord	2.0 m (6.6 ft)



Straight Guide, Straight Bit, Collet Cone, Wrench, Dust Nozzle (country-specific)

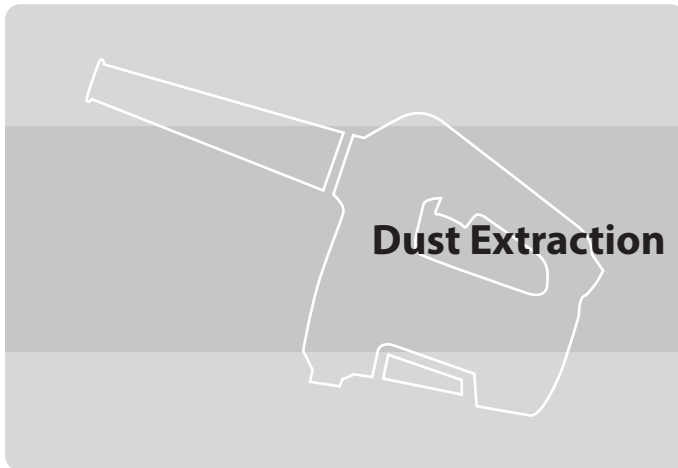

### Blower

**M4001B**  
600 W Variable Speed Blower

303



Continuous rating input	600W
Max Air Volume	0 - 4.1 m <sup>3</sup> /min
Max Air Velocity	0 - 91 m/s
Air Pressure	0 - 5.7 kPa
No Load Speed (RPM)	0 - 16,000
Vibration Level	Operation w/o Load: 2.5 m/s <sup>2</sup> or less
Sound Pressure Level	82 dB(A)
Sound Power Level	93 dB(A)
Dimensions (L x W x H)	480x185x178 mm (18-7/8"x7-1/4"x7")
Net weight	1.9 - 2.0 kg (4.3 - 4.5 lbs)
Power supply cord	2.0 m (6.6 ft.)



Nozzle, Dust Bag

### Blower

**M4000B**  
530 W Variable Speed Blower

85



Continuous rating input	530W
Air volume	1.2-2.9 m <sup>3</sup> /min
No Load Speed (RPM)	8,500 - 16,000
Vibration Level	Operation w/o Load: 2.5 m/s <sup>2</sup> or less
Sound Pressure Level	90 dB(A)
Sound Power Level	101 dB(A)
Dimensions (L x W x H)	427x161x212 mm (16-3/4"x6-3/8"x8-3/8")
Net weight	1.5 kg (3.4 lbs)
Power supply cord	2.0 m (6.6 ft)



Nozzle assembly, Sash Nozzle



# Makita®



Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202010

