




High Power
Durability
Digital Communication

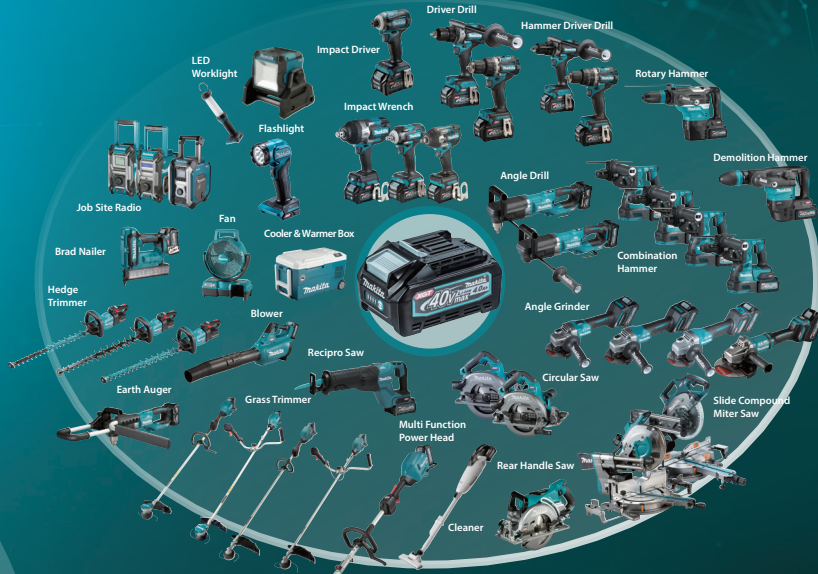

High performance drilling with light weight body

Portable Power Pack

PDC01

Powered by up to four 18V LXT batteries



PDC1200

Powered by 36V-40Vmax built-in battery



Charger: DC4001

Adapter set (40Vmax)

Part No. 191N62-4




Adapter between Battery box of Portable power pack and Product on 40Vmax XGT platform

Accessories

Earth auger drill bit

Length: 800mm



Blade for earth auger bit

Changing blade for Earth auger drill bit



Extension bar

Part No. E-07325



Pin for earth auger drill

Part No. E-07331



Handle set

Part No. 191P11-3

includes a bar which receives reaction force and an auxiliary handle, and helps the user drill holes in the ground easier.



Charging Time

Battery Model	Fast Charging	
	DC40RA	DC40RC
BL4020 2.0Ah	22 min	30 min
*1BL4025 2.5Ah	28 min	38 min
*1BL4040 4.0Ah	45 min	67 min
*1BL4050F 5.0Ah	50 min	85 min

*1 Recommended battery

Cordless Earth Auger DG001G

Variable Speed	Capacity	Sandy Soil: 200 mm Clay Soil: 150 mm
Brake	No Load Speed (RPM)	High / Low: 0 - 1,500 / 0 - 400
Reversing	Max Fastening Torque	High: 55 N·m (487 in.lbs.) Low: 136 N·m (1,210 in.lbs.)
Mechanical 2-Speed	Vibration Level	2.5 m/s ² or less
Torque Limiter	Sound Pressure Level	84 dB(A)
Soft Start	Sound Power Level	95 dB(A)
Built-in Job Light	Dimensions (L x W x H)	w/ BL4050F: 863 x 605 x 199 mm (34 x 23-3/4 x 7-7/8") w/ BL4040: 842 x 605 x 199 mm (33-1/4 x 23-3/4 x 7-7/8") w/ BL4020 / BL4025: 836 x 605 x 199 mm (33 x 23-3/4 x 7-7/8")
Carrying Case	Net weight	7.2 - 8.1 kg (15.9 - 17.9 lbs.)

Standard Equipment : Chuck Key, Hex Wrench, Adapter, Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202108



Max Drilling Capacity

ø200 mm

Net weight

7.8 kg

with BL4040



High power similar to 36cc engine product

Work amount depth 600mm / BL4040 / on full battery charge / low speed mode	
$\phi 150\text{mm}$ about 100 holes	$\phi 200\text{mm}$ about 65 holes



Reversing switch

enables to extract, in reverse rotation mode, an auger bit jammed in soil with high resistance like clay soil.



+




Torque limiter

The torque limiter will actuate when a certain torque level is reached at the low speed setting. The motor will disengage from the output shaft. When this happens, the drill bit will stop turning.

ADT

Automatic torque Drive Technology

automatically changes the drilling speed according to load conditions for an optimum operation

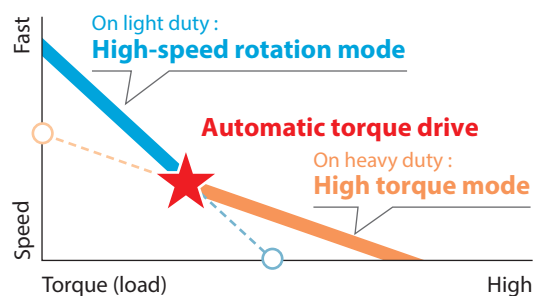

For larger holes



Auxiliary handle
Reaction receiver
Reversing switch
Twin LED job light
Mechanical 2-speed
 1 Low speed
 2 High speed
Adapter
BL MOTOR
 High power Brushless motor
XPT
 eXtreme Protection Technology
Earth auger drill bit
 Length: 800mm
 $\phi 100\text{ mm}$
 $\phi 150\text{ mm}$
 $\phi 200\text{ mm}$