



Petrol Mist Blower PM7651H (EU standard) PM7650H

Excellent spray range
up to 16m (52ft) horizontally




Photo: PM7651H

MM4

Automatic solution mixing

- Solution in tank is automatically mixed by intake air flow.
- The check valve is installed in the air flow route to prevent back flow of solution when the engine stopped.



Tube-mounted throttle



Single action button to turn on/off solution flow

Solution tank capacity 15L

Fan guard

installed between the engine and the tank to prevent leaves/debris from entering into the fan section



Tube for solution level check differs by countries.

Spray volume adjusting dial



Low vibration obtained by 4 damper springs mounted between the engine and the main frame for healthy operation

Photo: PM7651H

Accessories

Nozzle for blower




Part No.

Flat pipe	455634-8
End pipe 450	455632-2
End pipe 200	455631-4

Nozzles for mosquito extermination

Part No.

Nozzle set (0.7, 0.8)	196499-6
Nozzle set (0.5)	196616-8



Various pipes

Part No.

Straight pipe 630	453699-4
Straight pipe 380	453700-5
Bent pipe 630	453507-9

O ring set

Part No. 195926-0

Gasoline filter

Part No. 163532-9

Air filter

Part No. 442181-8

Spark plug (NGK CMR6A)

Part No. 168401-9

For blower use

Mist blower can also used as a backpack blower. Nozzles for blower are available as option.



Mist Blower PM7651H, PM7650H 75.6mL 4-stroke

	PM7651H	PM7650H
Anti Vibration	75.6mL	75.6mL
Primer Pump	1.8L	1.8L
Capacitor Discharge Ignition	14.1m ³ / min (497cu.ft / min)	14.1m ³ / min (497cu.ft / min)
Auto Decompression	85m/s	85m/s
The velocity of the wind (without blower pipes)	95.4dB(A)	95.4dB(A)
Sound pressure level	110.1dB(A)	110.1dB(A)
Sound power level	2.7m/s ²	2.7m/s ²
Vibration level	420x440x595mm	420x440x595mm
Dimensions (L x W x H)	(16-1/2"x17-1/4"x23-1/2")	(16-1/2"x17-1/4"x23-1/2")
Net weight*	14.1kg (31.1lbs)	13.3kg (29.3lbs)

Standard Equipment :

PM7651H : Oil bottle, Box wrench, Hand strap, Flexible pipe, Hose clamp, Hip belt set, Straight pipe, Bent pipe, End pipe, Flat pipe, Nozzle, Tube 10-500
PM7650H : Oil bottle, Box wrench, Hand strap, Screwdriver, Diffusion cover, Hose clamp, Flexible pipe, Straight pipe

*weight according to EPTA-Procedure 01/2003 Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN BF-AH

Nozzles for mosquito control



For users considering control of disease-carrying mosquitoes, the following options are available:

Nozzles for mosquito control
ø0.5mm, ø0.7mm, ø0.8mm
(These items are already used in Brasil.)



Comfortable backpack harness, well balanced solution tank design



Photo: PM7650H

Environment-friendly and cost-saving

75.6cm³ 4-stroke engine

- Low noise and clean exhaust emission
- Low fuel consumption and low running cost

MM4

• Unique L-shaped solution tank

is extended into the space between user's back and the engine to lower the center of gravity to obtain ideal weight balance for operation.

• Back pad and Shoulder straps

are designed for less stress to operator.

• Hard shoulder straps

always keep their shapes to provide sufficient spaces from back pad for user to make re-shouldering action easier in the field.

• Large through hole of solution tank

Air flow produced by blower's fan passes through the hole of solution tank to keep operator's back comfortable.



Diffusion cover (Wide spray attachment)

- Solution can be sprayed widely.




- The cover can be tied to the nozzle top with a string.



Various pipes available for added convenience


• Straight pipe 630

is convenient for long-reach applications such as spraying of pesticides on tall trees.

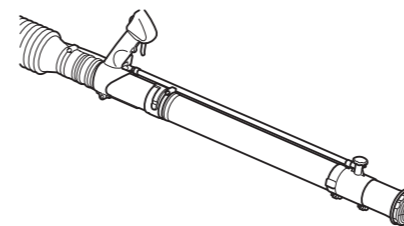

• Straight pipe 330

allows for easier spraying in narrow areas such as between orchard trees.



• Bent top pipe 630 (20°)

is suitable for upward spraying, and also provides more comfort and better control in narrow space applications.

