



**Cordless Power Scraper**  
**DHK180** Adapted for SDS-PLUS bits



# High power & Low vibration



Impact Energy

**3.1<sub>J</sub>**

EPTA-Procedure 05/2009:

Vibration Level

**4.5<sub>m/s<sup>2</sup></sub>**





# Excellent performance as AC power scraper

## 1 High Power and High efficiency

BL motor delivers high power equivalent to AC models.

**BL  
MOTOR**



### Impact Energy


**3.1 J**

EPTA-Procedure 05/2009:

## 2 Vibration absorbing housing

The housing construction reduces vibration of the rear handle and the barrel portion.

The vibrating section

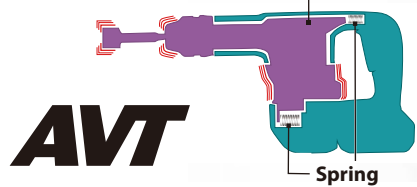

### Vibration Level

**4.5 m/s<sup>2</sup>**

## More controlled, easier scraping

achieved by moderating the increase in impact power during rise time.



Adapted for SDS-PLUS bits

### Twin LED job light

with preglow and afterglow functions.



**XPT**

Extreme Protection Technology



### 12 bit angle settings

Adjustable chisel angle allows for easy operation in various applications.



### Slide lever for trigger lock-on/ lock-off

- For lock-on of the trigger, pull and hold the trigger, then push the slide lever.
- For lock-off of the trigger, push the slide lever without pulling the trigger.

### Variable speed control by trigger



### Variable speed control by dial

enables to adjust scraping power to the material of subfloor/subwall.

## Accessories

### Hook set

Part No. 191C37-7



### Chisels

2019 ACCESSORY CATALOGUE

[http://www.makita.biz/product/ecatalog\\_acc\\_2019/index\\_h5.html#54](http://www.makita.biz/product/ecatalog_acc_2019/index_h5.html#54)



## Cordless Power Scraper



Variable Speed



Adapted for SDS-PLUS bits



Constant Speed



Built-in Job Light



Carrying Case

## DHK180 Adapted for SDS-PLUS bits

<b>Impact Energy</b>	EPTA-Procedure 05/2009: 3.1 J
<b>Blows Per Minute (BPM)</b>	0 - 3,200
<b>Vibration Level</b>	Chiselling: 4.5 m/s <sup>2</sup>
<b>Sound Pressure Level</b>	83 dB(A)
<b>Sound Power Level</b>	94 dB(A)
<b>Dimensions (L x W x H)</b>	368x99x211 mm (14-1/2"x3-7/8"x8-5/16")
<b>Net weight</b>	3.3 - 3.6 kg (7.3 - 7.9 lbs.)

**Standard Equipment:** Bull Point, Cold Chisel (country-specific), Scaling chisel (for tile), Hook, Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.

Items of standard equipment and specifications may vary by country or area.

**Makita Corporation**

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201911