



Satisfy Professional's Needs

Cordless Combination Hammer BHR202 20mm (13/16")


Adapted for
SDS-PLUS bits

18V 3.0Ah
LITHIUM-ION




THE TOUGHNESS

LXT
LITHIUM-ION

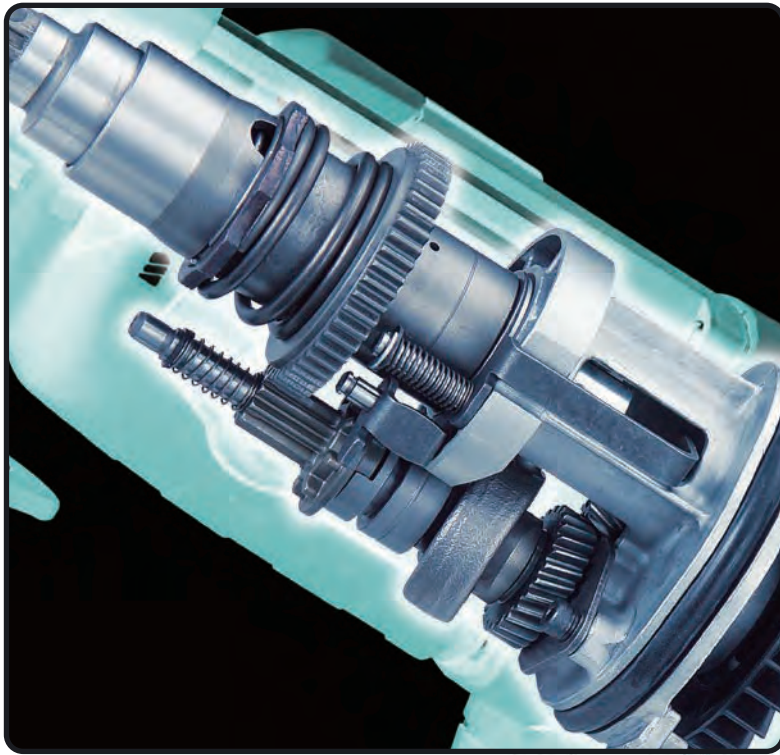


DRASTIC DURABLE

/// Added durability to impact bolt
 /// Large seal ring eliminates grease leakage from between inner housing and gear housing.

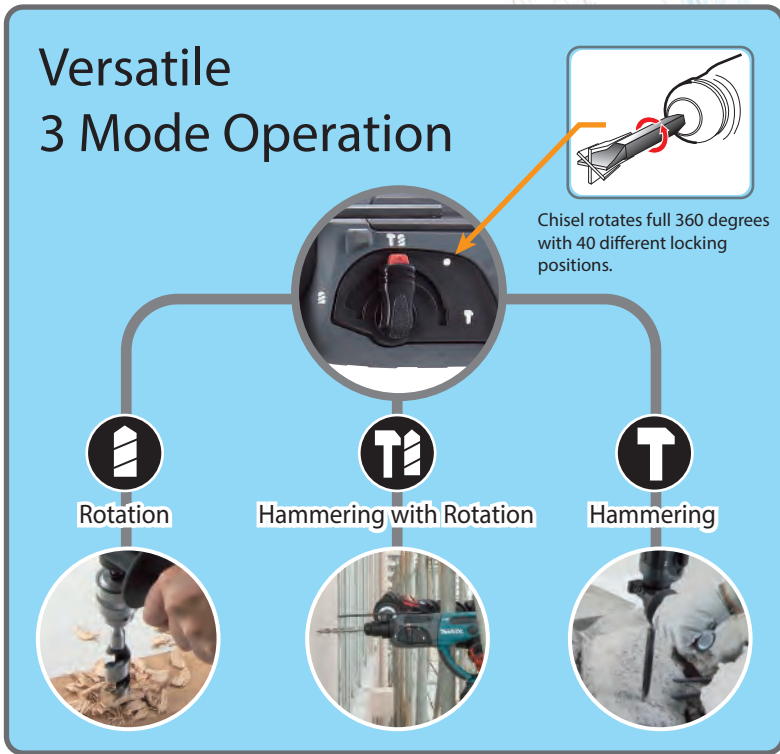


Light weight at only **3.2kg (7.0 lbs)**

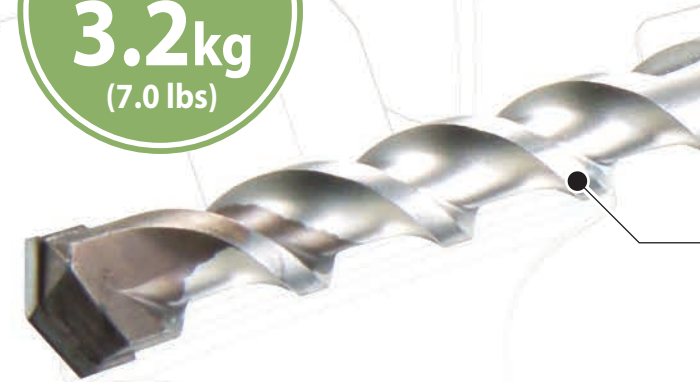


Cordless Combination Hammer **BHR202** **18V LITHIUM**



One-touch sliding chuck for easy bit changes

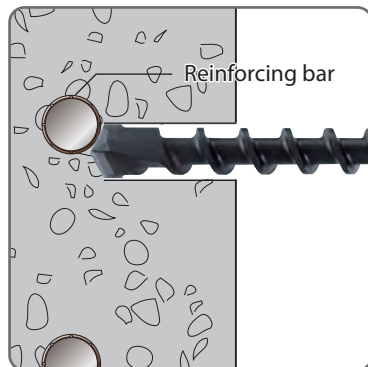

Torque limiter
 :: When drill bit hits against reinforcements, Torque limiter operates to stop.

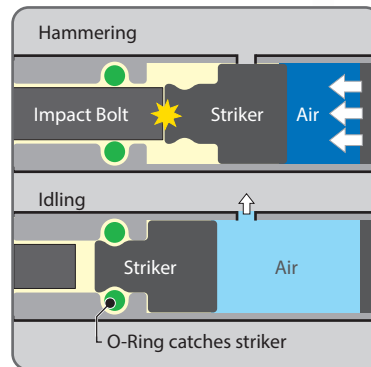

No hammering when idling ensures machine's long life.



1 Reversing switch operable by one hand
2 Variable speed control

CALLY ENHANCED ILITY

h matching surface

Rubberized soft grip provides more control and comfort.

Bumper protects the surface of workpiece and machine.

Adapted for SDS-PLUS bits
(Tool does not come with bit.)

mer

3.0Ah
LION



ol switch

LED job light with afterglow function

Unique rubber joint construction suppresses the transmission of vibration to battery terminals, minimizing battery failures such as terminal breakage or poor electrical contact. The tool body is separated into the upper and lower housings at the foot of handle portion where the housings are jointed with vibration absorbing cushion rubbers.



Accessories



1. Dust extractor attachment

Part No. 193472-7

Use with Hose 28-1.5 Part No. 192278-0



2. Dust cup set

Part No. 194580-7

Use with Grip base set Part No. 194582-3




3. Dust cup

Bit dia 6-14.5mm Part No. 421342-3

Bit dia 12-16mm Part No. 421664-1

(Protects operator from dust and debris)



4. Drill chuck assembly (13mm)

Part No. 122574-2

Use with Chuck key

Part No. 763432-9



5. Chuck adapter assembly

Part No. 122573-4

With screw M6 x 22



6. Battery protector

Part No. 194649-7



8. Hammer service kit

Part No. 188582-3



Comparison of Efficiency

Note: 1. The test results depend to a great extent on the hardness of the material, etc.


2. Numbers in the charts below are relative values when the capacities of **Competitor "D"** is indexed at 100.

Drilled 40mm depth hole with 6.5mm diameter.


Drilled 40mm depth hole with 10.5mm diameter.

Drilled 40mm depth hole with 12.5mm diameter.


Work speed

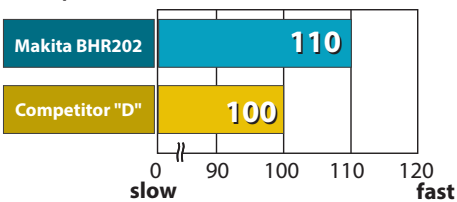

Work speed

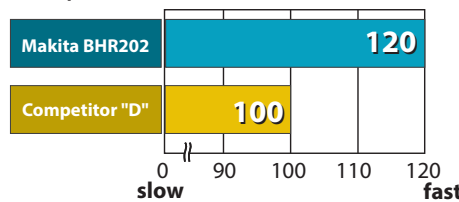

Work speed

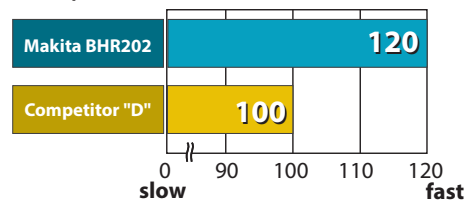

Cordless Combination Hammer

- Variable Speed
- Reversing
- Electric Brake
- Torque Limiter
- Dust Collecting
- Adapted for SDS-PLUS bits
- Built-in Job Light
- Carrying Case



18V 3.0Ah LITHIUM-ION



BHR202 20mm (13/16")

432 (mm)

Capacity	Concrete : 20mm (13/16") Steel : 13mm (1/2") Wood : 26mm (1")
Impacts per minute	0-4,000ipm
No load speed	0-1,100rpm
Dimensions (L x W x H)	358 x 84 x 259mm (14-1/8" x 3-5/16" x 10-1/4")
Net weight	3.2kg (7.0lbs)
Voltage	18V

Standard Equipment

Fast Charger, Battery Cartridge, Side Grip, Depth Gauge (Tool does not come with bit.)

Items of standard equipment and specifications may differ by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN Z23388-2 AI-AJ