

Satisfy Professional's Needs



Cordless Rotary Hammer HR166D 16 mm (5/8")




Adapted for
SDS-PLUS
bits

12V_{max}
LITHIUM-ION

BL
MOTOR

One-hand rotary hammer



with Side grip assembly
and Depth gauge

Powered by Slide Li-ion Battery of Makita's New 12Vmax Platform



BL1016
1.5Ah



BL1021B
2.0Ah



BL1041B
4.0Ah



DC10SB



DC10WD



Extremely Compact and Lightweight for increased maneuverability




250 mm

Lightweight
1.8 kg
with BL1016



Adapted for SDS-PLUS bits
One touch sliding chuck
for easy bit changes

Vibration absorbing housing
reduces the vibration to the hand.

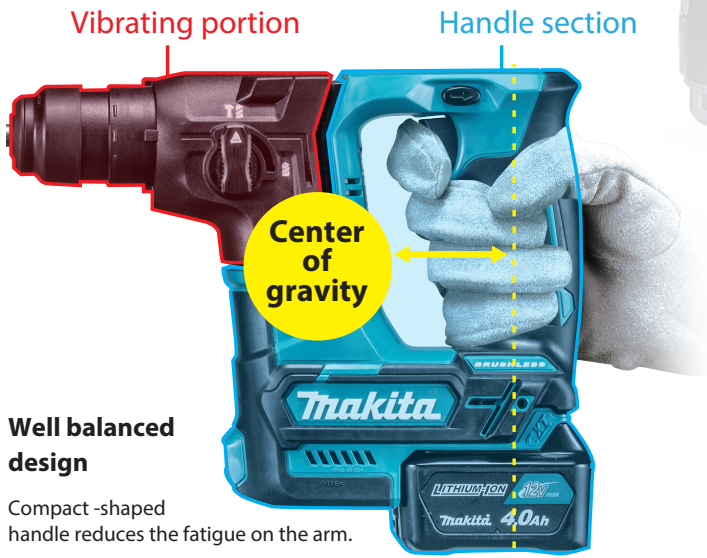

Well balanced design

Compact-shaped handle reduces the fatigue on the arm.



18V DHR242

LED job light




Brushless motor



Accessories

Wide hook set
(Option)



Part No. 197224-8

Dust cup set

Use with grip base set

Part No.
198362-9

198376-8 (EU)



Li-ion Battery & Charging Time Reference

		*BL1041B 12Vmax 4.0Ah	*BL1021B 12Vmax 2.0Ah	BL1016 12Vmax 1.5Ah
Charging time		60 min	30 min	22 min
		130 min	70 min	50 min

Cordless Rotary Hammer

HR166D

- Variable Speed
- Brake
- Reversing
- Constant Speed
- Adapted for SDS-PLUS bits
- Dust Collecting
- Built-in Job Light
- Carrying Case

Impact Energy Capacity	EPTA-Procedure 05/2009: 1.1 J Concrete: 16 mm (5/8") Steel: 10 mm (3/8") Wood: 13 mm (1/2")
Impacts Per Minute (IPM)	0 - 4,800
No Load Speed (RPM)	0 - 680
Vibration Level	Hammer Drilling Into Concrete: 7.5 m/s ² Drilling Into Metal: 2.5 m/s ² or less
Sound Pressure Level	86 dB(A)
Sound Power Level	97 dB(A)
Dimensions (L x W x H)	250x74x187mm (9-7/8"x2-15/16"x7-3/8")
Net weight	BL1016: 1.8 kg (4.0lbs.) BL1041B: 2.0 kg (4.4 lbs.)

Standard Equipment:

Dust Cup (country-specific), Side Grip, Depth Gauge, Battery, Charger

weight according to EPTA-Procedure 01/ver.2.1
Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201703