

Satisfy Professional's Needs

Makita[®]

Cutter
4100NH3 110mm (4-3/8")



Smoother operation
with grooved base plate back surface

Redesigned base with grooved back surface for smoother operation.

The grooves added on the back surface of the base reduce the resistance caused by surface tension of water to prevent the base from adhering to the surface of workpiece in wet applications.



Flat rear end is convenient for replacing the diamond wheel.




Anti-slip dimples


On-tool storage for hex wrench

Easy alignment of base end with the cutting line on workpiece.

Water supply fixture can be mounted.

1,200W
continuous rating input

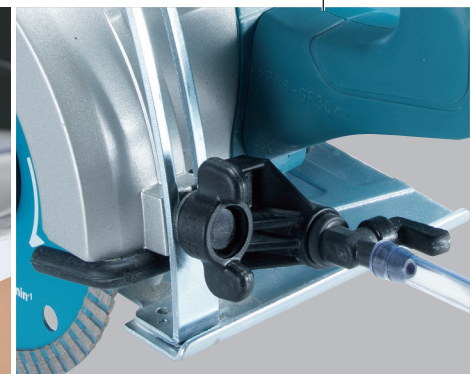

Cutter	4100NH3 110mm (4-3/8")	303
 Double Insulation	Continuous rating Input 1,200W	
	Capacity Max. cutting : 32 mm (1-1/4")	
	Blade diameter 110 mm (4-3/8")	
	No load speed (rpm) 13,000	
	Dimensions (L x W x H) 227x209x166mm (8-15/16"x8-1/4"x6-1/2")	
	Net Weight* 2.9kg (6.4lbs)	
	Power supply cord 2.0m (6.6ft)	

*weight according to EPTA-Procedure 01/2003 Items of standard equipment and specifications may vary by country or area.



Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN BD-AI