



Satisfy Professional's Needs


Combination Hammer
HR2475 24mm (15/16")



Adapted for
SDS-PLUS bits

**DRASTICALLY
ENHANCED
DURABILITY**

**Hi-Spec
Combination
Hammer**

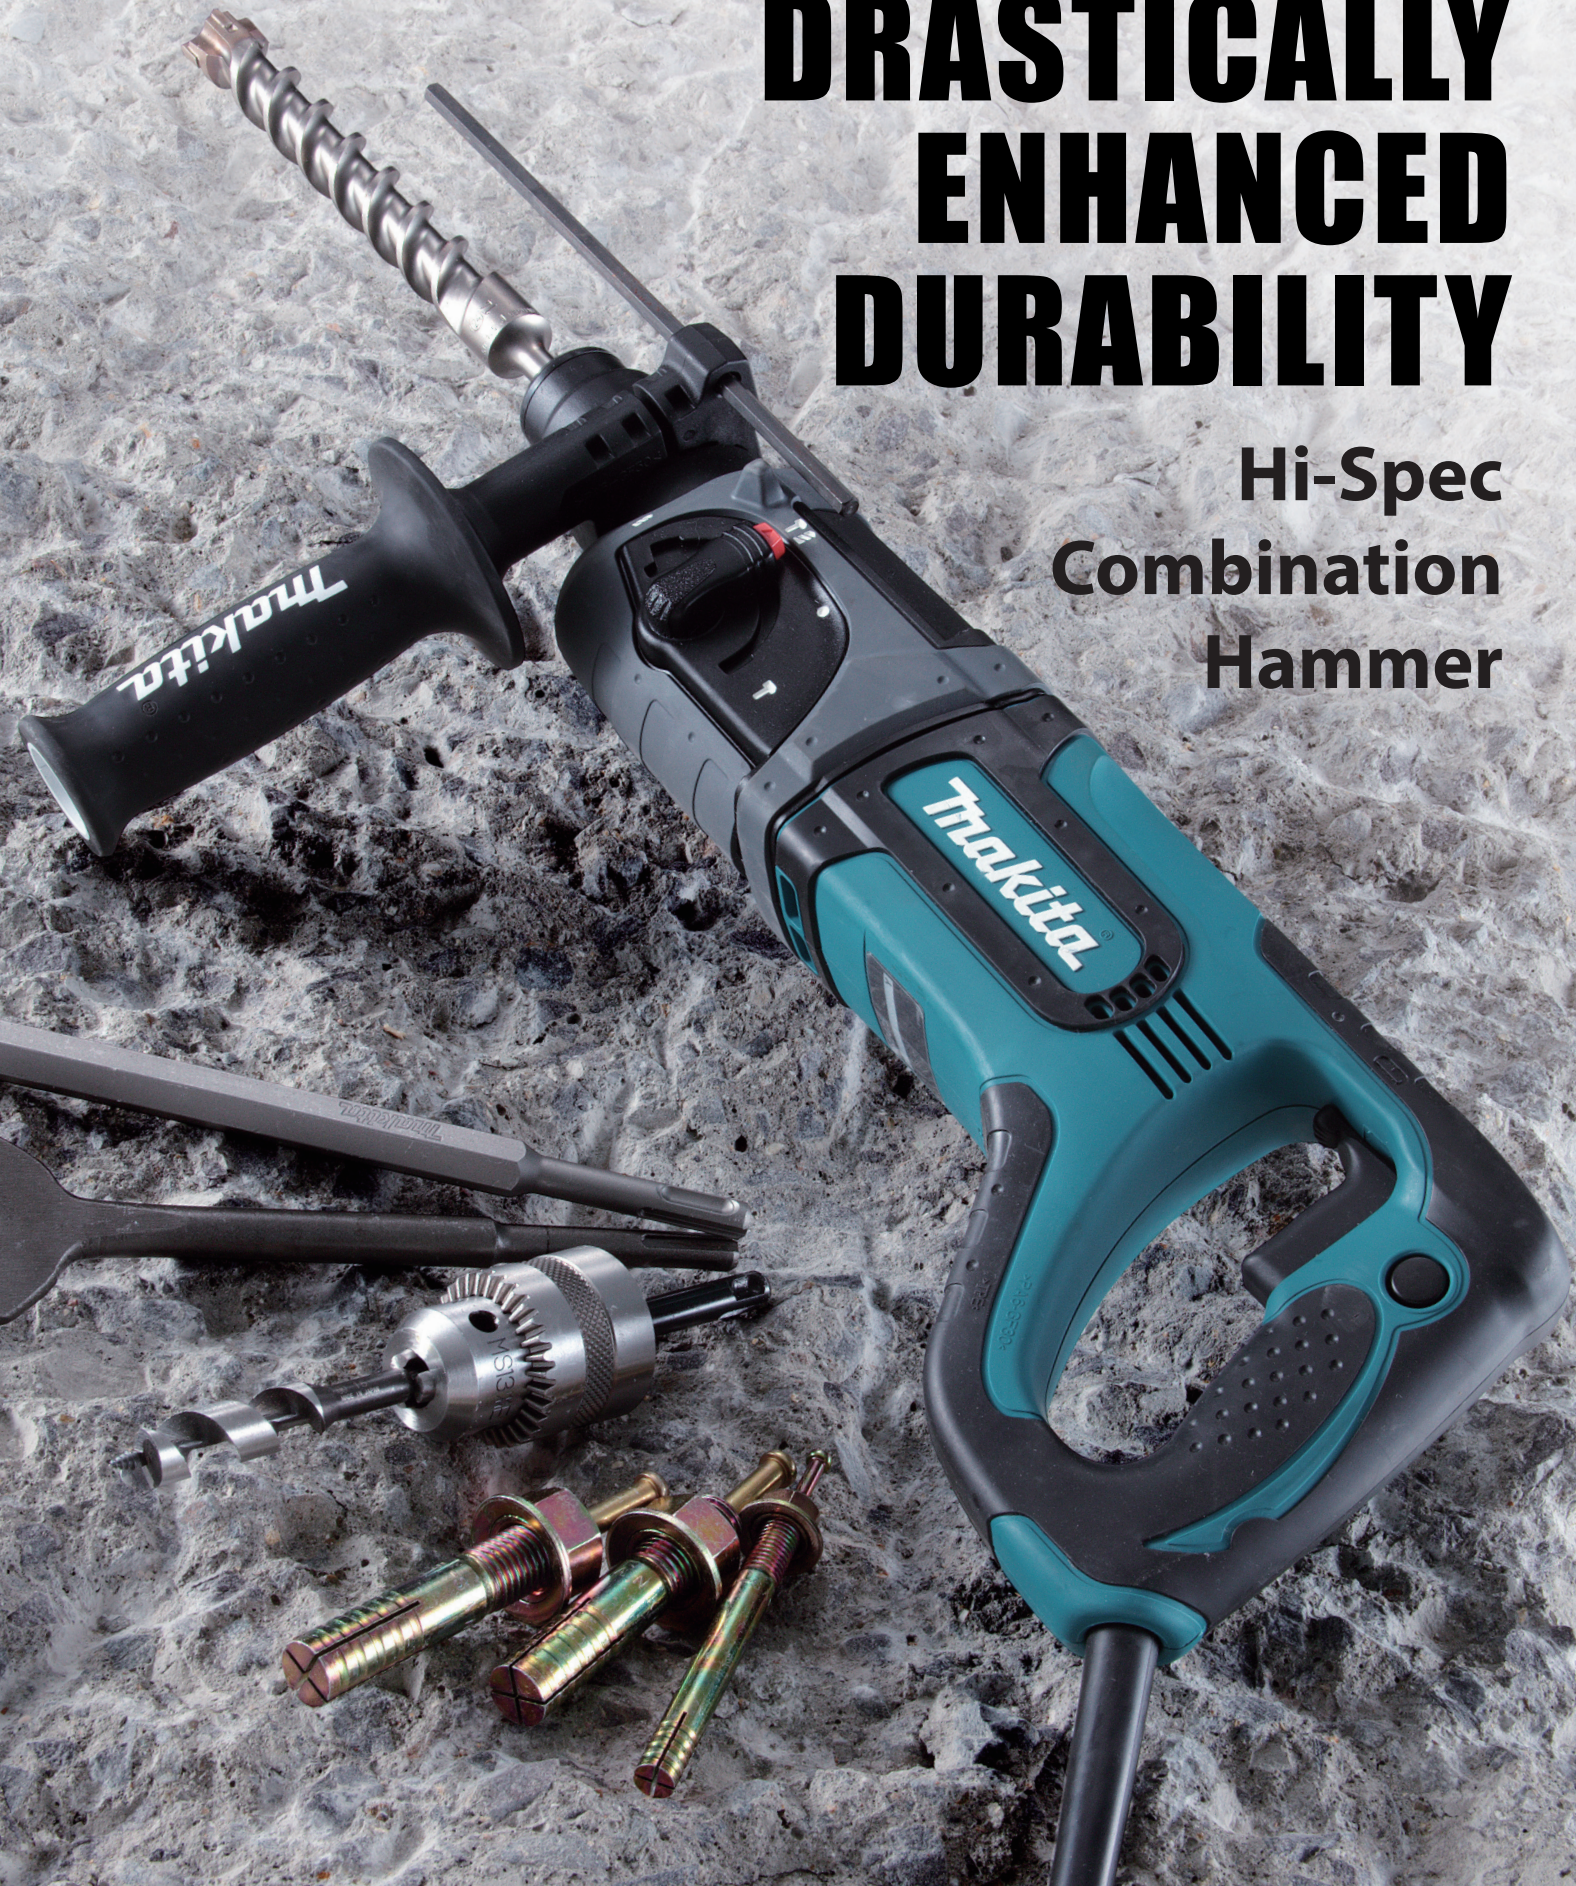

HIGH DURABILITY

- Added durability to impact bolt
- Large seal ring eliminates grease leakage from matching surface between inner housing and gear housing.
- Varnish on armature protects from dust and wire-breakage.



Adapted for SDS-PLUS bits

One-touch sliding chuck for easy bit changes

Ergonomic side handle with rubberized soft grip provides more comfort and better control while minimizing hand fatigue and pain.

Bumper protects the surface of workpiece and machine.

Torque limiter
:: When drill bit hits against reinforcements, Torque limiter operates to stop.

Reversing lever

Variable speed control by trigger

Ergonomic D-shaped Handle with rubberized soft grip provides more comfort and better control while minimizing hand fatigue and pain.

Hammering
Impact Bolt, Striker, Air

Idling
Striker, Air, O-Ring catches striker

No hammering when idling ensures machine's long life.

Reinforcing bar

Versatile 3 Mode Operation

Chisel rotates full 360 degrees with 40 different locking positions.

Rotation **Hammering with Rotation** **Hammering**

Accessories

Dust extractor attachment
Part No. 193472-7
Use with Hose 28-1.5
Part No. 192278-0



Waterproof cover
Part No. 421755-8




Dust cup set
Part No. 194580-7
Use with Grip base set
Part No. 194582-3



Drill chuck assembly (13mm)
Part No. 122574-2
Use with Chuck key (Part No.763432-9)



Dust cup
Bit dia 6-14.5mm
Part No. 421342-3
Bit dia 12-16mm
Part No. 421664-1



Keyless drill chuck assembly (13mm)
Part No. 192892-2



Chuck adapter assembly
Part No. D-14093
With screw M6 x 22



(Protects operator from dust and debris)

Combination Hammer

- Double Insulation
- Variable Speed
- Reversing
- Torque Limiter
- Dust Collecting
- Adapted for SDS-PLUS bits
- Carrying Case



HR2475 24mm (15/16")

419

Continuous rating Input	780W
Capacity	Concrete : 24mm (15/16") Steel : 13mm (1/2") Wood : 32mm (1-1/4")
Impacts per minute (ipm)	0-4,500
No load speed (rpm)	0-1,100
Dimensions (L x W x H)	(16-7/8" x 3-5/16" x 6-1/4")
Net weight*	3.0kg (6.6lbs)
Power supply cord	4.0m (13.1ft)

*weight according to EPTA-Procedure 01/2003

Standard Equipment

Side Handle, Depth Gauge (Tool does not come with bit.)

Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN Z23473-2 AJ-BA