



Combination Hammer with Self Dust Collection System HR2661 26 mm (1")



Adapted for
SDS-PLUS bits


D-Handle Combination Hammer with Self Dust Collection System




CLEAN

Dust Collection System
Equipped with HEPA Filter

HEPA
filter




AVT

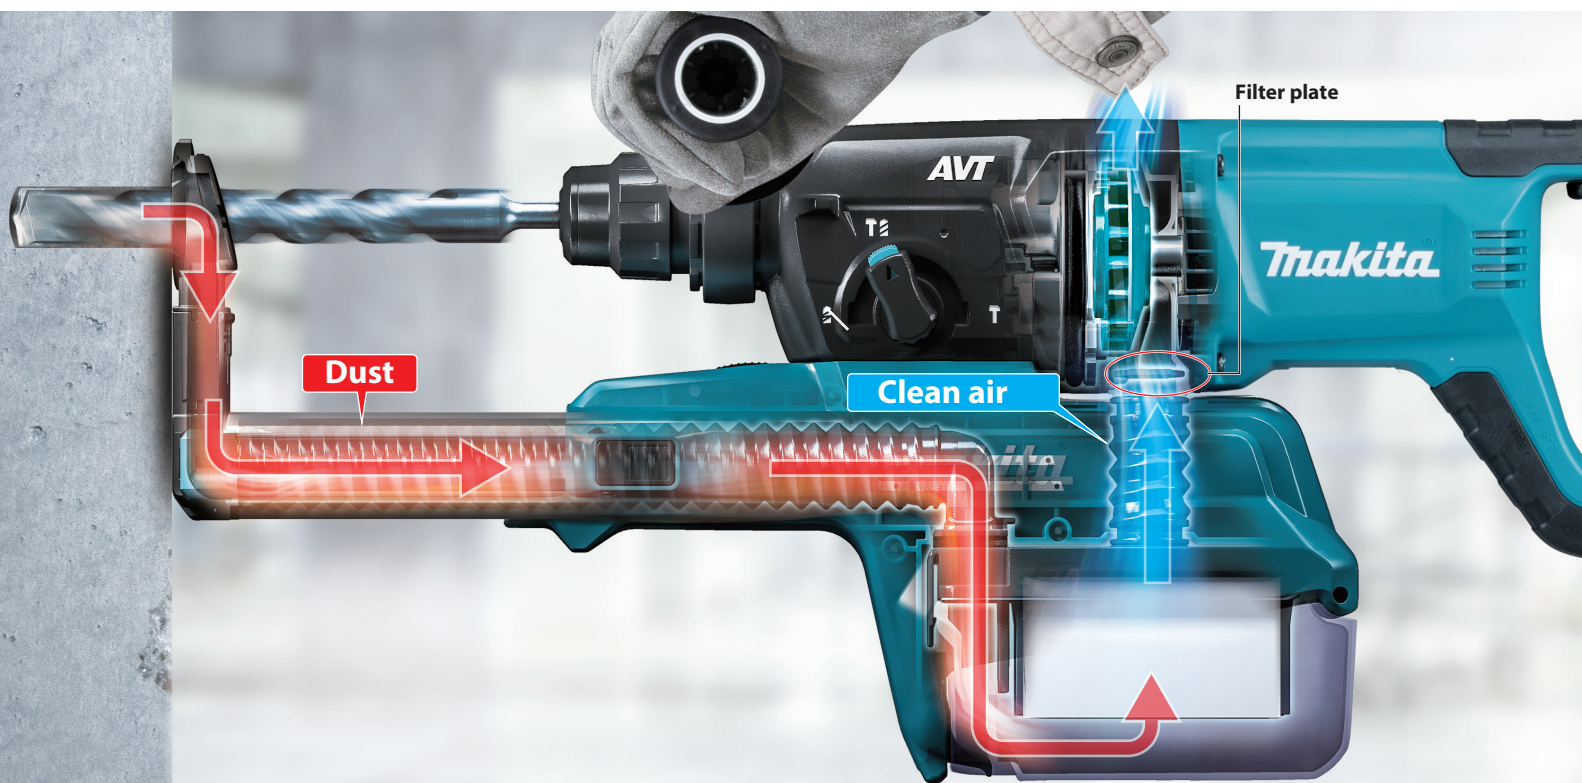




High dust collection performance for overhead application

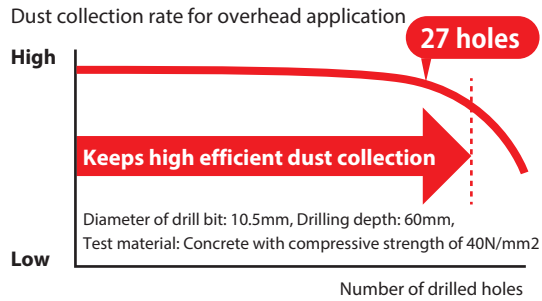

Large Fan Provides Incredibly High Dust Extraction Power

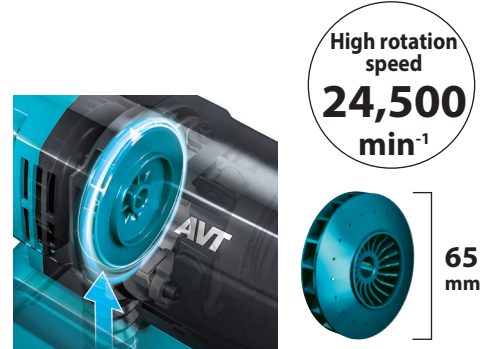

Enables to accept longer drill bits

Adjustable drilling depth

Telescopic guide also functions as a depth gauge. A desired drilling depth can be adjusted simply by sliding a push button on the guide to the desired point.



Position adjustment of Dust Extraction Inlet

one action adjustment according to bit length simply by pushing a single push button



Secure connection

between dust case and dust collecting section allows for less dust leakage


Easy disposal of dust and easy cleaning of dust case



Extremely low vibration achieved by ...


Damper spring

absorbs reaction force of impact energy.



Counterweight mechanism

reduces vibration by moving a counterweight in the opposite direction of the piston.

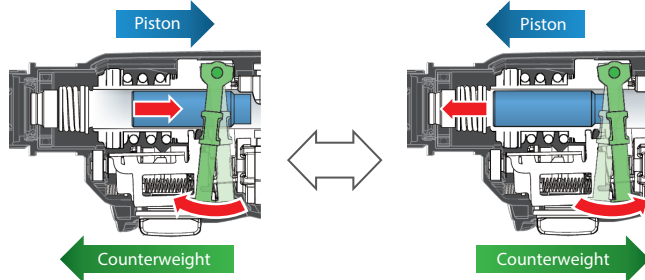

AVT
ANTI VIBRATION TECHNOLOGY

Accessories

Dust case

Part No. 198982-9
198981-1(EU)



Filter

Part No. 196164-7
196165-5(EU)



HEPA
filter

Combination Hammer with Self Dust Collection

HR2661 26 mm (1"), Adapted for SDS-PLUS bits

419

- Double Insulation
- Variable Speed
- Reversing
- Adapted for SDS-PLUS bits
- Torque Limiter
- Dust Collection
- Carrying Case

Standard Equipment :

Side Grip, Depth Gauge, Sealing Cap

Continuous rating input	800W
Impact Energy	EPTA-Procedure 05/2009: 2.4 J Our experimental conditions: 2.9 J
Capacity	Concrete: 26 mm (1"), Core Bit: 68 mm (2-11/16")
	Diamond Core Bit (Dry Type): 80 mm (3-1/8")
	Steel: 13 mm (1/2"), Wood: 32 mm (1-1/4")
Blows Per Minute (BPM)	0 - 4,500
No Load Speed (RPM)	0 - 1,100
Sound Pressure Level	90 dB(A)
Sound Power Level	101 dB(A)
Vibration Level	Hammer Drilling Into Concrete: 9.5 m/s ²
Dimensions (L x W x H)	666x89x228 mm (26-1/4"x3-1/2"x9")
Net weight	3.3-4.4kg (7.3-9.7lbs.)
Power supply cord	2.5 m (8.2 ft.)

The weight may differ depending on the attachment(s). The lightest and heaviest combination, according to EPTA-Procedure 01/2014
Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201709