



Portable Cut-off LW1400 / LW1401 355mm (14")

Powerful Motor 2,200w

Photo : LW1400

Toolless replacement of
abrasive cut-off wheel
(LW1400only)

Large spark guard




High power Portable Cut-off



Toolless adjustment of guide plate (LW1400 only)

allows for easy adjustment of the guide plate by simple handling

- 3 stage position change
- 0 to 45 degree angle adjustment



Change of saw head locking device from chain lock to pin lock (LW1400 only)

makes it easier to lock down the saw head for storage and transport.



Carry handle

for easy transport to job site



Shaft lock for easy replacement of abrasive cut-off wheel

Quick release vise

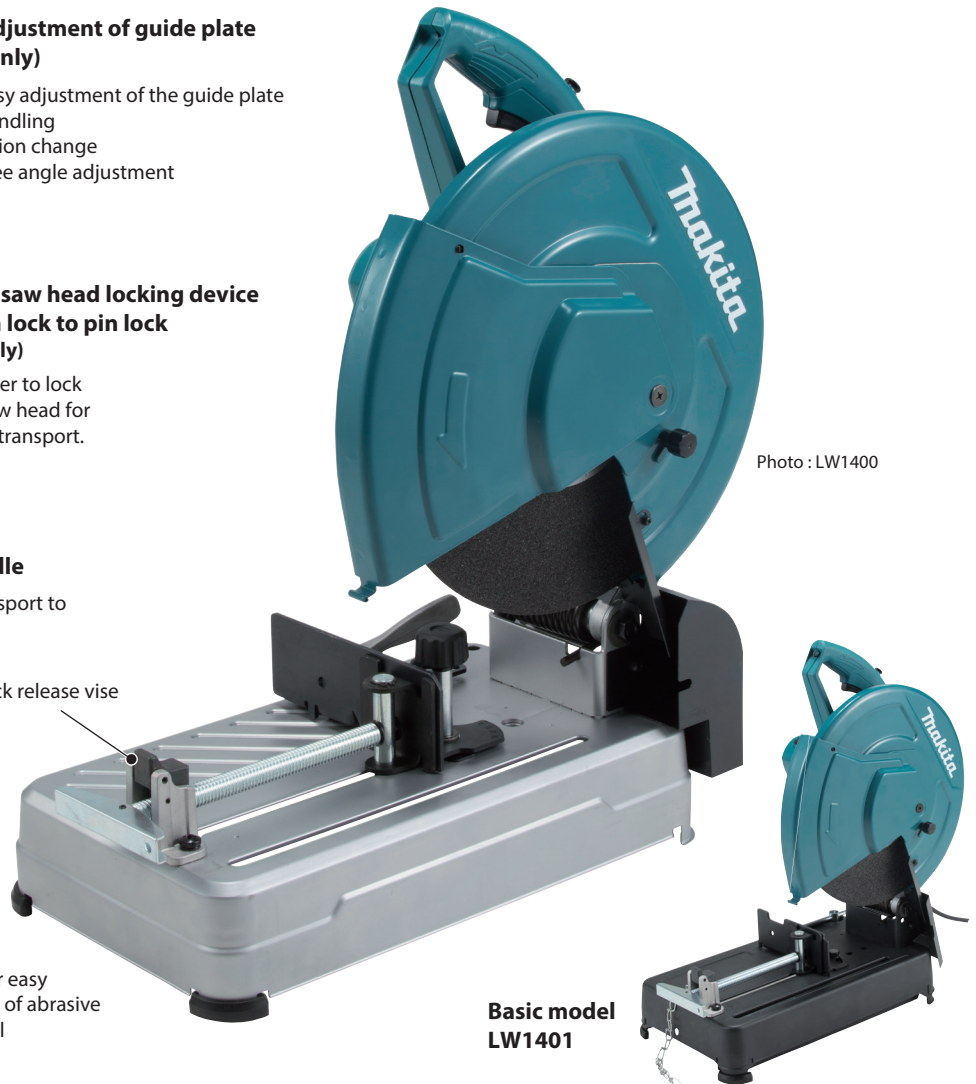


Photo : LW1400

Basic model LW1401

Cutting Capacity

Form of materials	Miter angle	
	0°	45°
	D: ø127mm (2")	D: ø127mm (2")
	H x W: 102 x 194mm (4" x 7-5/8") 70 x 233mm (2-3/4" x 9-1/8")	H x W: 115 x 103mm (4-1/2" x 4-1/16")
	H x W: 119 x 119mm (4-11/16" x 4-11/16")	H x W: 106 x 106mm (4-3/16" x 4-3/16")
	S x S: 137 x 137mm, T: 10mm (5-3/8" x 5-3/8", 3/8")	S x S: 100 x 100mm, T: 10mm (4" x 4", 3/8")

D: Diameter W: Width H: Height S: Side T: Thickness

Accessory

Abrasive cut-off wheel

For all ferrous materials (Steel, cast iron) and other hard metals. These items are available on request. Contact us for the minimum order quantity.

Size (mm): 355x3x25.4 Grit: A36P G.F.Q'ty: 1.0G	Per pkg.	Part No.
	5	A-89545-5
	25	A-89545-25
	5	A-89953-5
	5	B-10730-5
	25	B-10730-25
	5	B-10665-5
	25	B-10665-25

Double Reinforced Abrasive cut-off wheel

Size (mm): 355x3x25.4 Grit: A30P G.F.Q'ty: 2.0G	Per pkg.	Part No.
	5	B-16891-5
	25	B-16891-25



	Portable Cut-off LW1400 / LW1401 355mm (14") 203	
	LW1400	LW1401
Double Insulation		
Continuous rating Input	2,200W	2,200W
Wheel diameter	355mm (14")	355mm (14")
Hole dia.	25.4mm (1")	25.4mm (1")
No load speed (rpm)	3,800	3,800
Dimensions (L x W x H)	530x295x640mm (20-7/8"x11-5/8"x25-1/4")	500x290x620mm (19-3/4"x11-3/8"x24-3/8")
Net Weight*	17.0kg (37.5lbs)	16.6kg (36.6lbs)
Power supply cord	2.5m (8.2ft)	2.5m (8.2ft)

*Weight according to EPTA-Procedure 01/2003

Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 201511