

Satisfy Professional's Needs



Cordless Pressure Washer DHW180



Entrance area



Car wash



Sash



Easy Cleaning Anytime, Anywhere

18V
LITHIUM-ION

Regular pressure

2.4 MPa

In High mode, when connected to water supply

Continuous use



High / Low mode

18/50 min

Battery: w/ BL1830B on a full battery charge
Self-priming



Sufficient cleaning power for light-duty tasks

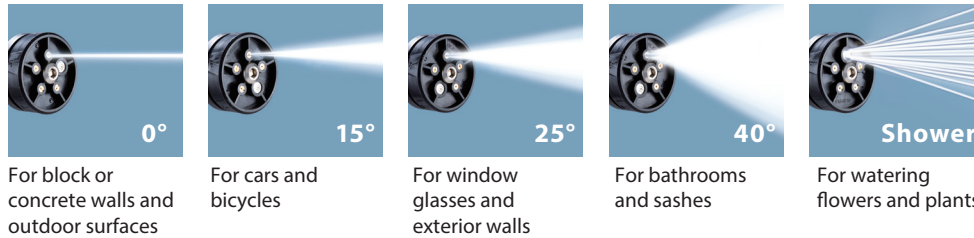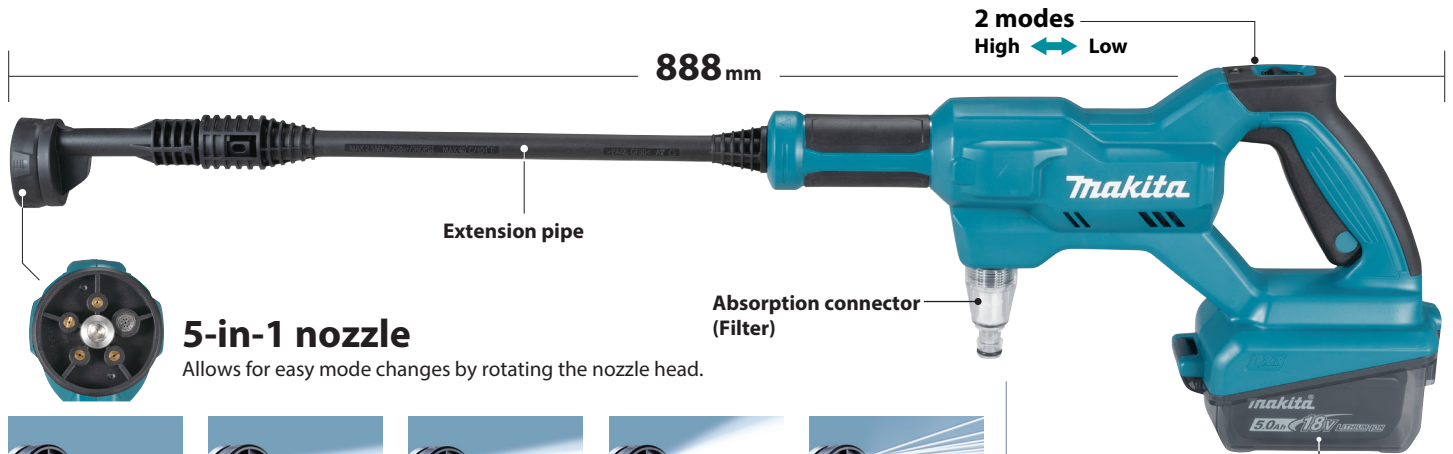

Battery box
Prevents water intrusion into the battery and terminals

Lightweight & Compact design
Easy-to-handle handgun style, yet sufficient cleaning power for light-duty washing tasks on work sites and for home use

Three types of water supply methods

Adaptable to various usage environments



Water faucet

When water volume is needed (with a hose clamp*)



*Commercially available

Self-priming

When a water source is distant

- Max suction height: 2m
- Minimum water level of 25 mm is required



Plastic bottle

When a water source is not available

Plastic bottle adapter
Optional accessory



Battery capacity warning function

Blinking: 20% or less battery capacity
Solid red: Empty battery or stop due to an error



Accessories

Foam nozzle

Part No.
LX00000001



Plastic bottle adapter

Part No.
LX00000004



Angle nozzle

Part No.
LX00000002



Wheel brush

Part No.
LX00000003



Charging Time

| | Fast Charging | |
|----------------------|---------------|----------------|
| | DC18RC | DC18SD |
| BL1815N 1.5Ah | 15 min | 30 min |
| BL1820B 2.0Ah | 24 min | 45 min |
| BL1830B 3.0Ah | 22 min | 60 min |
| BL1840B 4.0Ah | 36 min | 90 min |
| BL1850B 5.0Ah | 45 min | 110 min |
| BL1860B 6.0Ah | 55 min | 130 min |

Cordless Pressure Washer

DHW180

| | | |
|--------------------|-----------------------------------|--|
| Electronic 2-Speed | Regular pressure | Self-priming, High / Low: 2.0 / 0.8 Mpa Connection to water supply, High / Low: 2.4 / 0.8 Mpa |
| | Regular flow rate | Self-priming, High / Low: 2.5 / 1.5 L/min Connection to water supply, High / Low: 2.5 / 1.5 L/min w/o Nozzle: 5.3 L/min |
| | Max flow rate | 18, 50 min. |
| | Continuous use | BL1830B |
| | Continuous use (Battery) | High, Low |
| | Continuous use (Mode) | Self-priming |
| | Continuous use (Other conditions) | 2.0 m (6.7 ft) |
| | Max suction height | 6 m (19.7 ft) |
| | Supplied hose length | 419 x 99 x 239 mm (16-1/2 x 3-7/8 x 9-3/8") |
| | Dimensions (L x W x H) | 2.3 - 2.7 kg (5.1 - 6.0 lbs.) |
| | Net weight | BL1815N - BL1860B |
| | Net weight (Battery) | Hose (for both self-priming/water supply) |
| | Net weight (Attachment) | |

Standard Equipment : Hose, Absorption connector, Nozzle, Extension, Cleaner pin, Battery, Charger

The weight may differ depending on the attachment(s), including the battery cartridge.

Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202407



www.makita.com