

XGT
40V^{Li-ion}max

18V^{Li-ion}
LITHIUM-ION

■ **Comfort/Lifestyle Line up**

Cordless Job Site Speaker



■ **Continuous run time (approx): hour**

On a single full battery charge

Model No.	MR010G					DMR057											
	40Vmax					18V											
Battery	PDC1200	BL4020	BL4025	BL4040	BL4050F	BL1815N	BL1820B	BL1830B	BL1840B	BL1850B	BL1860B						
Radio	477	23	28	41	58	15	20	28	40	52	63						
Flashlight (H/L)	538/997	26/49	31/58	46/86	66/122	9.0/17	12/23	16/32	23/45	30/58	37/70						
Lantern (4 sides/3 sides)	277/380	13/18	16/22	24/33	34/47	4.5/6.5	6.0/8.5	8.5/12	12/17	16/22	19/26						
Radio+Lantern (4 sides)	176	8.5	10	15	21	3.5	4.5	6.5	9.5	12	14						

Model No.	MR009G					DMR056						DMR055					
	40Vmax					18V											
Battery	PDC1200	BL4020	BL4025	BL4040	BL4050F	BL1815N	BL1820B	BL1830B	BL1840B	BL1850B	BL1860B	BL1815N	BL1820B	BL1830B	BL1840B	BL1850B	BL1860B
Radio	340	20	24	36	51	13	17	24	34	44	53	15	20	28	40	52	63
Flashlight (H/L)	440/813	26/49	31/58	46/86	66/122	9.0/17	12/23	16/32	23/45	30/58	37/70	-	-	-	-	-	-
Lantern (4 sides/3 sides)	227/313	13/18	16/22	24/33	34/47	4.5/6.5	6.0/8.5	8.5/12	12/17	16/22	19/26	4.5/6.5	6.0/8.5	8.5/12	12/17	16/22	19/26
Radio+Lantern (4 sides)	140	8.0	10	14	21	3.5	4.5	6.5	9.0	12	14	3.5	4.5	6.5	9.0	12	14

■ **Charging Time**

MR010G / MR009G				DMR057 / DMR056 / DMR055													
DC4001	DC4001	DC4001	DC4001	DC18RC	DC18SD	DC18RC	DC18SD										
Fast Charging	Fast Charging	Fast Charging	Fast Charging	Fast Charging	Fast Charging	Fast Charging	Fast Charging										
PDC1200	BL4020 2.0Ah	BL4025 2.5Ah	BL4040 4.0Ah	BL4050F 5.0Ah	BL1815N 1.5Ah	BL1820B 2.0Ah	BL1830B 3.0Ah	BL1840B 4.0Ah	BL1850B 5.0Ah	BL1860B 6.0Ah							
360 min	22 min	28 min	45 min	50 min	15 min	24 min	22 min	36 min	45 min	55 min	30 min	45 min	60 min	90 min	110 min	130 min	

Cordless Radio with Lantern

MR010G / MR009G / DMR057 / DMR056 / DMR055

	MR010G / MR009G / DMR057 / DMR056	DMR055
Standard Equipment : Strap Hook	Frequency Band FM: 87.5-108 MHz / DAB: 174.928-239.200 MHz / DAB+: 174.928-239.200 MHz (DAB/DAB+: MR009G/DMR056 only)	FM: 87.5-108 MHz / AM: 522-1,710 kHz
Battery and charger are sold separately	Speaker Size Ø57 mm	Ø57 mm
	Illuminance Lantern, Daylight white, 4 sides, High / Low: 145 / 72 or more lx Lantern, Neutral white, 4 sides, High / Low: 140 / 70 or more lx Lantern, Warm white, 4 sides, High / Low: 130 / 65 or more lx Flashlight, High / Low: 1,000 / 500 or more lx	Lantern, Warm white, 4 sides, High: 130 or more lx
	Luminous flux Lantern, Daylight white, 4 sides, High / Low: 310 / 155 or more lm Lantern, Neutral white, 4 sides, High / Low: 300 / 150 or more lm Lantern, Warm white, 4 sides, High / Low: 260 / 130 or more lm Flashlight, High / Low: 200 / 100 or more lm	Lantern, Warm white, 4 sides, High: 260 or more
	Bluetooth Version: 5.0 Profile: A2DP, SCMS-T, AVRCP Supported Codec: MR010G / DMR057: SBC, MR009G / DMR056: SBC / AAC Max Transmission Range (Optimum): 10 m (33 ft) Transmission Power Class: 2 / Compatible Bluetooth Profile: A2DP	
	Dimensions (L x W x H) Net weight w/o Battery: 126 x 127 x 240 mm (5 x 5 x 9-1/2") MR010G / MR009G: 1.6 - 2.2 kg (3.5 - 4.9 lbs.) DMR057 / DMR056: 1.3 - 1.6 kg (2.9 - 3.5 lbs.)	w/o Battery: 126 x 127 x 240 mm (5 x 5 x 9-1/2") 1.2 - 1.6 kg (2.7 - 3.5 lbs.)

Not covered by EPTA-Procedure
Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202208

Satisfy Professional's Needs

Makita

Cordless Radio with Lantern
MR010G / MR009G
DMR057 / DMR056 / DMR055

XGT
LXT

XGT
40V^{Li-ion}max

18V^{Li-ion}
LITHIUM-ION



photo: MR010G

MR010G / MR009G

Lantern
20 LEDs

Flashlight
1 LEDs

Light tone and color
Daylight white
Neutral white
Warm white



DMR057 / DMR056

Lantern
20 LEDs

Flashlight
1 LEDs

Light tone and color
Daylight white
Neutral white
Warm white



DMR055

Lantern
20 LEDs

Light tone and color
Warm white



Bluetooth **dab+** **XPT**

▲ MR010G / MR009G / DMR057 / DMR056
▲ MR009G / DMR056

XGT
40V LITHIUM max

18V LITHIUM-ION



photo: MR010G



photo: DMR057



photo: DMR057

Cordless Radio with Lantern that can be used at work, play, or anytime

Lantern with 3 light tone settings

MR010G / MR009G / DMR057 / DMR056 only



Warm white

You will feel relaxed.
(about 2,500K)

Neutral white

(about 3,500K)


Daylight white

You can easily read what is written / printed.
(about 5,000K)

Switch

MR010G / MR009G / DMR057 / DMR056

DMR055

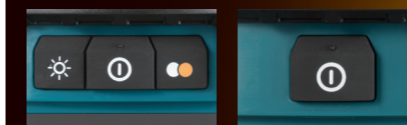

- Brightness setting button (2 stages) (MR010G / MR009G / DMR057 / DMR056 only)
- Lantern light tone setting button (3 tones) (MR010G / MR009G / DMR057 / DMR056 only)
- On/off and Mode select button

Foldable hanging hook



Strap with hook allows to illuminate downwards, for example, from the ceiling to the floor

Flashlight

MR010G / MR009G / DMR057 / DMR056 only



- Daylight white single LED
- Brightness settings (2 stages)

Lens guard also works as an FM antenna.

LCD digital display

Cordless Radio with Lantern

XGT 40V LITHIUM max	18V LITHIUM-ION	18V LITHIUM-ION										
 <p>MR010G / MR009G Bluetooth dcb+ XPT ▲ MR009G</p> <table border="1"> <tr> <td>Lantern 20 LEDs</td> <td>Light tone and color Daylight white</td> </tr> <tr> <td>Flashlight 1 LEDs</td> <td>Neutral white Warm white</td> </tr> </table> <p>photo: MR009G</p>	Lantern 20 LEDs	Light tone and color Daylight white	Flashlight 1 LEDs	Neutral white Warm white	 <p>DMR057 / DMR056 Bluetooth dcb+ XPT ▲ DMR056</p> <table border="1"> <tr> <td>Lantern 20 LEDs</td> <td>Light tone and color Daylight white</td> </tr> <tr> <td>Flashlight 1 LEDs</td> <td>Neutral white Warm white</td> </tr> </table> <p>photo: DMR057</p>	Lantern 20 LEDs	Light tone and color Daylight white	Flashlight 1 LEDs	Neutral white Warm white	 <p>DMR055 XPT</p> <table border="1"> <tr> <td>Lantern 20 LEDs</td> <td>Light tone and color Warm white</td> </tr> </table>	Lantern 20 LEDs	Light tone and color Warm white
Lantern 20 LEDs	Light tone and color Daylight white											
Flashlight 1 LEDs	Neutral white Warm white											
Lantern 20 LEDs	Light tone and color Daylight white											
Flashlight 1 LEDs	Neutral white Warm white											
Lantern 20 LEDs	Light tone and color Warm white											

Continuous run time (approx) On a single full battery charge

MR010G (with BL4050F)				DMR057 (with BL1850B)				with BL1850B		
Radio	Radio+Lantern	Lantern	Flashlight	Radio	Radio+Lantern	Lantern	Flashlight	Radio	Radio+Lantern	Lantern
51h	21h	34h	66h	44h	12h	16h	30h	52h	12h	16h
MR009G (with BL4050F)				DMR056 (with BL1850B)						
Radio	Radio+Lantern	Lantern	Flashlight	Radio	Radio+Lantern	Lantern	Flashlight			
58h	21h	34h	66h	52h	12h	16h	30h			

USB output port

MR010G / MR009G / DMR057 / DMR056 only

- With USB output switch
- With Auto-off function
- Type A, 1 port, DC5V / 2.4A



Multi functions

MR010G / MR009G / DMR057 / DMR056

Lantern	Flashlight	FM radio (9 stations)
dcb+ (9 stations)	USB output port	Bluetooth

▲ MR009G / DMR056 only

DMR055

Lantern	AM / FM radio (9 stations)
---------	----------------------------



photo: MR009G

XPT