




# Wall Chaser SG1251 125mm (5")

**Clean, compact and comfortable**



Connectable to vacuum cleaners (option) for clean work environment

## Improved trigger switch

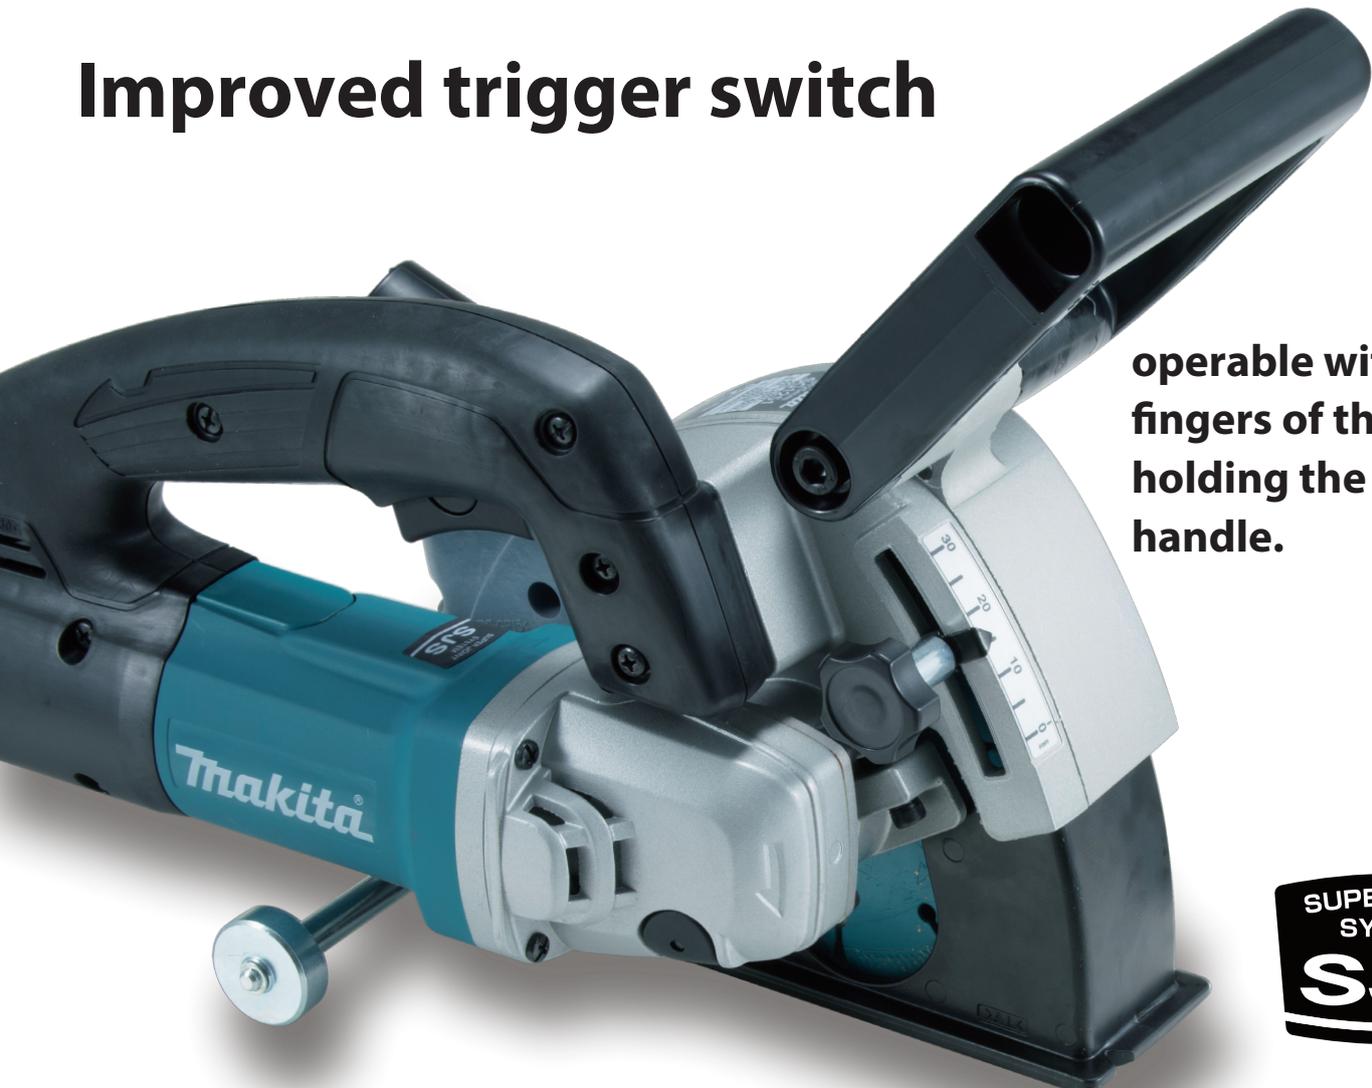

operable with the fingers of the hand holding the top handle.



# Wall Chaser offers the most efficient cutting of clean edged grooves for channels.



## Improved trigger switch

- With dust cover to prevent ingress of dust and dirt
- Operable with the fingers of the hand holding the top handle
- With easy-to-pull two-finger trigger



Ergonomically designed front handle



Main top handle with soft grip



Adjustable cutting depth

## Electronic control

- Overload protection
- Soft start
- Constant speed control




Aluminum blade case designed to allow for easy blade replacement



Connectable to vacuum cleaners for clean work environment

## Cutting width

Adjustable cutting width in 9 stage by inserting spacers of 3 mm (1/8") and 6 mm (1/4") in thickness.

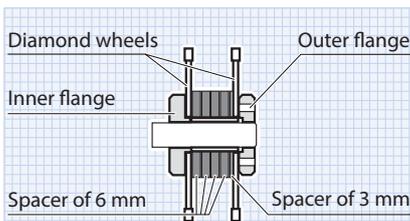

Cutting width	Q'ty of 6 mm spacer	Q'ty of 3 mm spacer
6 mm		1 pc.
9 mm	1 pc.	
12 mm	1 pc.	1 pc.
15 mm	2 pcs.	
18 mm	2 pcs.	1 pc.
21 mm	3 pcs.	
24 mm	3 pcs.	1 pc.
27 mm	4 pcs.	
30 mm	4 pcs.	1 pc.

## Wall Chaser

**SG1251 125mm (5")**

318

- Double Insulation
- Constant Speed
- Soft Start
- Dust Collecting
- Carrying Case

<b>Continuous rating Input Capacity</b>	1,400W Depth : 0-30mm (0 - 1-3/16") Width : 6-30mm (1/4 - 1-3/16")
<b>Blade diameter</b>	125mm (5")
<b>No load speed (rpm)</b>	10,000
<b>Dimensions (L x W x H)</b>	350x151x178mm (13-3/4"x5-15/16"x7")
<b>Net weight</b>	4.5kg (9.9lbs)
<b>Power supply cord</b>	5.0m (16.4ft)

### Standard Equipment:

Diamond Wheel x2, Hex Wrench, Lock Nut Wrench

weight according to EPTA-Procedure 01/2003

Items of standard equipment and specifications may vary by country or area.

# Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN BE-AH